

Telephone (505) 294-6971

Charles B. Reynolds & Associates

Consulting Geophysicists and Geologists
11909 Allison Court N.E.
Albuquerque, New Mexico 87112

June 17, 1975

Chevron Oil Company
Minerals Staff
225 Bush Street
San Francisco, California 94104

Attention: Mr. W. E. Mero

Final Report Submittal
Soda Lake Area, Nevada

Dear Mr. Mero:

Enclosed are two copies of our final report covering the recent Soda Lake, Churchill County, Nevada shallow seismic reflection survey.

Perhaps the most interesting and potentially useful developments are the northwest-trending fault system and the suggestions of possible concentric faulting, folding and withdrawal subsidence around an indicated high (volcanic center ?) southwest of Soda Lake.

Thank you very much.

Yours truly,

Charles B. Reynolds
Charles B. Reynolds

CBR/ar


SODA LAKE AREA SEISMIC SURVEY

CHURCHILL COUNTY, NEVADA

Introduction: During April and early May, 1975, a shallow reflection seismic survey was carried out in the Soda Lake area, near Fallon, Nevada for the Minerals Staff of the Chevron Oil Company. The purpose of the survey was to provide structural geological information as an aid in exploration for geothermal steam resources. Faulting and folding systems were regarded as of importance in geothermal exploration in the area.

The survey consisted of seven lines (three east-west and four north-south) totalling about 24 miles in length. Station spacing along the lines was 330 feet (100 meters) measured by use of a measuring rope of that length. As many survey monuments such as section corners as possible were used in locating the lines accurately on a U.S.G.S. topographic map. Elevations for elevation corrections were taken from the topographic map, supplemented by field observations. The data were corrected to a reference datum plane at 4000 feet above sea level using a correction velocity of 5000 feet per second, which was selected on the basis of short refraction measurements.

The seismic energy source used consisted of a 300 lb. steel weight dropped free-fall 3.5 feet. The average number of drops summed at each station was slightly greater than three, for a total average energy of about 3300 ft/lbs per station. The recording instruments included a Seaman Nuclear Corp. single-channel engineering-type seismograph, with digital summing memory, modified to incorporate frequency filters, programmed gain expansion, a paper strip chart recorder and a magnetic cassette recorder. The receiver array consisted of 12 Mark Products 21L, 10Hz geophones spaced 12 feet apart inline for a theoretical group length of 144 feet. The weight was usually dropped one or more times at each of two positions 48 feet apart symmetrically placed forward and back of the group center and offset about 8 feet from the geophone line (see sketch below) to achieve constant normal moveout. One-half second from time zero was recorded at each station.

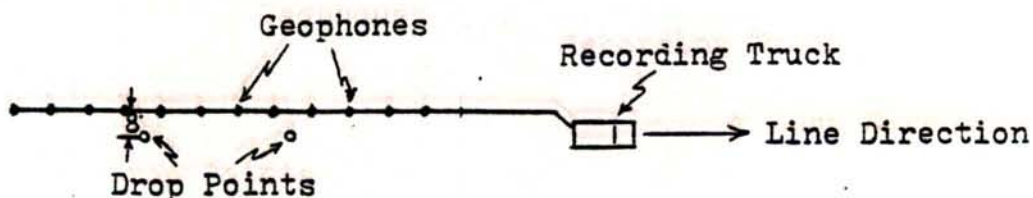

The resulting data were assembled into elevation corrected VAR record sections with one centimeter trace spacing and a time scale of one second equals 30 cm.. The record sections were then picked, and migrated depth sections constructed using the point-arc method. In the point-arc method, a circular arc corresponding to the depth calculated for the picked, corrected time of an event at a given station is swung from the plot point (center of spread) for the station on the depth section. A curve tangent to that arc and adjacent station arcs for the same event is then drawn. The velocity function used for the Soda Lake survey is one fitted to the sonic log data from the Chevron-Phillips Soda Lake No. 1-29 well ($V_i = 5000 + 4.16Z$, $Z < 1200'$; $V_i = 10,000$, $Z \geq 1200'$; velocities in ft/sec and Z in feet below +4000'). The depth of penetration indicated varied from about 1,000 feet to about 2,000 feet, but was more often about 1,500 feet.

Finally, a structure contour map was constructed, using the migrated depth section and based on a phantom near a reflection horizon believed to be reasonably persistent throughout the area. Correlation of this event between fault blocks is felt to be moderately reliable in most cases. The event chosen is commonly the deepest strong (high-amplitude) event recorded. As mapped, it varies from about 300 feet below datum at the highest point to nearly 1500 feet below datum at the lowest point. This horizon should have been penetrated at about 450-500 feet in the Chevron-Phillips No. 1-29 well. It appears at least locally possibly to be an angular unconformity. Table 1 shows the horizon depths used in making the map.

Results: The resulting record sections and migrated sections for Line SL-1 through SL-7 are included with this report as is the structure contour map.

The structure contour map shows the area to be characterized by northwest-trending faults and nearly equidimensional fault-related structural highs and lows. The faults appear to be generally short (the longest appears to be only about $1\frac{1}{2}$ miles in map length) and the structural highs and lows generally are less than one-half square mile in area. One possible exception is a structural high indicated southwest of Soda Lake which may be much larger. Also of interest are two deep structural lows, one northwest and one east of Soda Lake. These have something of the appearance of withdrawal subsidence lows, and might be postulated to be part of a system of such lows ringing the larger structural high southwest of Soda Lake; if such is the case, the high might be a major volcanic dome or buried vent. It might further be postulated that the faults in this area trend northwest because they are part of a set of concentric faults ringing the volcanic center (?) southwest of Soda Lake.

Many other indicated faults of smaller displacement have been disregarded in the making of the map. Most of the

faults observed on the seismic data appear to be normal faults or vertical in attitude, but a few suggest high-angle reverse faults. None of the possible high-angle reverse faults, however, appear to have large displacement.

Another point of note with regard to the faults in the area is that few seem to generate well-developed diffraction systems. This may be interpreted to suggest that considerable crushing of nearby rock may be associated with the faulting here.

Respectfully submitted,

Charles B. Reynolds
Charles B. Reynolds
Registered Geophysicist (Calif.)
Certified Professional Geologist

Enclosures:

7 VAR record sections
7 migrated depth sections
1 structure contour map
1 table

TABLE I

Depths - Mapped Horizon
Soda Lake Area

Line SL-1

| Sta. No. | Depth | Elevation | Sta. No. | Depth | Elevation |
|----------|-------|-----------|----------|-------|-----------|
| 1 | 790 | 3210 | 48 | 740 | 3260 |
| 2 | 790 | 3210 | 49 | 735 | 3265 |
| 3 | 770 | 3230 | 50 | 745 | 3255 |
| 4 | 745 | 3255 | 51 | 750 | 3250 |
| 5 | 700 | 3300 | 52 | 725 | 3275 |
| 6 | 850 | 3150 | 53 | 650 | 3350 |
| 7 | 850 | 3150 | 54 | 650 | 3350 |
| 8 | 830 | 3170 | 55 | 685 | 3315 |
| 9 | 800 | 3200 | 56 | 685 | 3315 |
| 10 | 750 | 3250 | 57 | 660 | 3340 |
| 11 | 730 | 3270 | 58 | 630 | 3370 |
| 12 | 750 | 3250 | 59 | 680 | 3320 |
| 13 | NV | | 60 | 710 | 3290 |
| 14 | NV | | 61 | 715 | 3285 |
| 15 | NV | | 62 | 715 | 3285 |
| 16 | NV | | 63 | 715 | 3285 |
| 17 | NV | | 64 | 700 | 3300 |
| 18 | 1365 | 2635 | 65 | NV | |
| 19 | 1350 | 2650 | 66 | 600 | 3400 |
| 20 | 1300 | 2700 | 67 | 600 | 3400 |
| 21 | 1220 | 2780 | 68 | 610 | 3390 |
| 22 | 1165 | 2835 | 69 | 620 | 3380 |
| 23 | 1115 | 2885 | 70 | 665 | 3335 |
| 24 | 1055 | 2945 | 71 | 670 | 3330 |
| 25 | 1000 | 3000 | 72 | 700 | 3300 |
| 26 | 925 | 3055 | 73 | 730 | 3270 |
| 27 | 900 | 3100 | 74 | 725 | 3275 |
| 28 | 870 | 3130 | | | |
| 29 | 810 | 3190 | | | |
| 30 | 750 | 3250 | | | |
| 31 | 705 | 3295 | | | |
| 32 | 670 | 3330 | | | |
| 33 | 650 | 3350 | | | |
| 34 | 645 | 3355 | | | |
| 35 | 650 | 3350 | | | |
| 36 | 675 | 3325 | | | |
| 37 | 700 | 3300 | | | |
| 38 | 700 | 3300 | | | |
| 39 | 725 | 3275 | | | |
| 40 | 760 | 3240 | | | |
| 41 | 785 | 3215 | | | |
| 42 | 800 | 3200 | | | |
| 43 | 820 | 3180 | | | |
| 44 | 845 | 3155 | | | |
| 45 | 850 | 3150 | | | |
| 46 | 825 | 3175 | | | |
| 47 | 775 | 3225 | | | |

TABLE I

Depths - Mapped Horizon
Soda Lake Area

Line SL-2

| Sta. No. | Depth | Elevation | Sta. No. | Depth | Elevation |
|----------|-------|-----------|----------|-------|-----------|
| 1 | 635 | 3365 | 48 | 565 | 3435 |
| 2 | 630 | 3370 | 49 | 590 | 3410 |
| 3 | 635 | 3365 | 50 | 620 | 3380 |
| 4 | 650 | 3350 | 51 | 640 | 3360 |
| 5 | NV | | 52 | 630 | 3370 |
| 6 | 750 | 3250 | 53 | 660 | 3340 |
| 7 | 770 | 3230 | 54 | 650 | 3350 |
| 8 | 800 | 3200 | 55 | 600 | 3400 |
| 9 | 810 | 3190 | 56 | 550 | 3450 |
| 10 | NV | | 57 | 520 | 3480 |
| 11 | 530 | 3470 | 58 | 480 | 3520 |
| 11.5 | 550 | 3450 | 59 | 365 | 3635 |
| 12 | 565 | 3435 | 60 | 425 | 3575 |
| 13 | 590 | 3410 | 61 | 445 | 3555 |
| 14 | 585 | 3415 | 62 | 430 | 3570 |
| 15 | 615 | 3385 | 63 | 500 | 3500 |
| 16 | 630 | 3370 | 64 | 520 | 3480 |
| 17 | 675 | 3325 | 65 | 510 | 3490 |
| 18 | 700 | 3300 | 66 | 575 | 3425 |
| 19 | 750 | 3250 | 67 | 570 | 3430 |
| 20 | 780 | 3220 | 68 | 545 | 3455 |
| 21 | 800 | 3200 | 69 | 530 | 3470 |
| 22 | 800 | 3200 | 70 | 525 | 3475 |
| 23 | 790 | 3210 | 71 | 525 | 3475 |
| 24 | 770 | 3230 | 72 | 500 | 3500 |
| 25 | 760 | 3240 | | | |
| 26 | 735 | 3265 | | | |
| 27 | NV | | | | |
| 28 | 385 | 3615 | | | |
| 29 | 380 | 3620 | | | |
| 30 | 375 | 3625 | | | |
| 31 | 425 | 3575 | | | |
| 32 | 440 | 3560 | | | |
| 33 | 440 | 3560 | | | |
| 34 | 450 | 3550 | | | |
| 35 | 485 | 3515 | | | |
| 36 | 510 | 3490 | | | |
| 37 | 535 | 3465 | | | |
| 38 | 560 | 3440 | | | |
| 39 | 585 | 3415 | | | |
| 40 | 600 | 3400 | | | |
| 41 | 360 | 3640 | | | |
| 42 | 375 | 3625 | | | |
| 43 | 430 | 3570 | | | |
| 44 | 475 | 3525 | | | |
| 45 | 525 | 3475 | | | |
| 46 | 580 | 3420 | | | |
| 47 | 650 | 3350 | | | |

TABLE I

Depths - Mapped Horizon

Soda Lake Area

Line SL-3Line SL-4

| Sta. No. | Depth | Elevation | Sta. No. | Depth | Elevation |
|----------|-------|-----------|----------|-------|-----------|
| 1 | 550 | 3450 | 1 | 825 | 3175 |
| 2 | 580 | 3420 | 2 | 775 | 3225 |
| 3 | 600 | 3400 | 3 | 740 | 3260 |
| 4 | 630 | 3370 | 4 | 705 | 3295 |
| 5 | 640 | 3360 | 5 | 685 | 3315 |
| 6 | 630 | 3370 | 6 | 360 | 3640 |
| 7 | 630 | 3370 | 7 | 375 | 3625 |
| 8 | 630 | 3370 | 8 | 410 | 3590 |
| 9 | 660 | 3320 | 9 | 450 | 3550 |
| 10 | 655 | 3345 | 10 | 460 | 3540 |
| 11 | 630 | 3370 | 11 | 510 | 3490 |
| 12 | 685 | 3315 | 12 | 550 | 3450 |
| 13 | 645 | 3355 | 13 | 585 | 3415 |
| 14 | 625 | 3375 | 14 | 605 | 3395 |
| 15 | 575 | 3425 | 15 | 645 | 3355 |
| 16 | 550 | 3450 | 16 | 690 | 3310 |
| 17 | 535 | 3465 | 17 | 725 | 3275 |
| 18 | 525 | 3475 | 18 | 770 | 3230 |
| 19 | 475 | 3525 | 19 | 820 | 3180 |
| 20 | 440 | 3560 | 20 | 845 | 3155 |
| 21 | 400 | 3600 | 21 | 835 | 3165 |
| 22 | 385 | 3615 | 22 | 785 | 3215 |
| 23 | 390 | 3610 | 23 | 780 | 3220 |
| 24 | 420 | 3580 | 24 | 780 | 3220 |
| 25 | 475 | 3525 | 25 | 790 | 3210 |
| 26 | 490 | 3510 | 26 | 780 | 3220 |
| 27 | 500 | 3500 | 27 | 760 | 3240 |
| 28 | 480 | 3520 | 28 | 765 | 3235 |
| 29 | 550 | 3450 | 29 | 775 | 3225 |
| 30 | 610 | 3390 | 30 | 800 | 3200 |
| 31 | 635 | 3365 | 31 | 775 | 3225 |
| 32 | 735 | 3265 | 32 | 740 | 3260 |
| 33 | 680 | 3320 | 33 | 720 | 3280 |
| 34 | 640 | 3360 | 34 | 535 | 3465 |
| 35 | 610 | 3390 | 35 | 565 | 3435 |
| 36 | 625 | 3375 | 36 | 600 | 3400 |
| 37 | 625 | 3375 | 37 | 620 | 3380 |
| 38 | 620 | 3380 | 38 | 625 | 3375 |
| 39 | 600 | 3400 | | | |
| 40 | 550 | 3450 | | | |
| 41 | 485 | 3515 | | | |
| 42 | 430 | 3570 | | | |
| 43 | 475 | 3525 | | | |
| 44 | 530 | 3470 | | | |
| 45 | 585 | 3415 | | | |
| 46 | 635 | 3365 | | | |
| 47 | NV | | | | |
| 48 | 670 | 3330 | | | |
| 49 | 675 | 3325 | | | |
| 50 | 660 | 3340 ✓ | | | |

TABLE I

Depths - Mapped Horizon
Soda Lake Area


| <u>Line SL-5</u> | | | <u>Line SL-6</u> | | |
|------------------|-------|-----------|------------------|-------|-----------|
| Sta. No. | Depth | Elevation | Sta. No. | Depth | Elevation |
| 1 | 665 | 3335 | 1 | NV | |
| 2 | 690 | 3310 | 2 | 1435 | 2565 |
| 3 | 720 | 3280 | 3 | 1410 | 2590 |
| 4 | 795 | 3205 | 4 | 1385 | 2615 |
| 5 | 845 | 3155 | 5 | 1330 | 2670 |
| 6 | 875 | 3125 | 6 | 1235 | 2765 |
| 7 | 920 | 3080 | 7 | 1120 | 2880 |
| 8 | 955 | 3045 | 8 | 1025 | 2975 |
| 9 | 940 | 3060 | 9 | 930 | 3070 |
| 10 | 895 | 3105 | 10 | 775 | 3225 |
| 11 | 990 | 3010 | 11 | 730 | 3270 |
| 12 | 935 | 3065 | 12 | 665 | 3335 |
| 13 | 875 | 3125 | 13 | 625 | 3575 |
| 14 | 850 | 3150 | 14 | 650 | 3350 |
| 15 | 835 | 3165 | 15 | 630 | 3370 |
| 16 | 820 | 3180 | 16 | 610 | 3390 |
| 17 | 785 | 3215 | 17 | 600 | 3400 |
| 18 | 780 | 3220 | 18 | 620 | 3380 |
| 19 | 800 | 3200 | 19 | 650 | 3350 |
| 20 | 820 | 3180 | 20 | 475 | 3525 |
| 21 | 840 | 3160 | 21 | 480 | 3520 |
| 22 | 695 | 3305 | 22 | 495 | 3505 |
| 23 | 640 | 3360 | 23 | 515 | 3485 |
| 24 | 600 | 3400 | 24 | 545 | 3455 |
| 25 | 570 | 3430 | 25 | 595 | 3405 |
| 26 | 565 | 3435 | 26 | 630 | 3370 |
| 27 | 580 | 3420 | 27 | 640 | 3360 |
| 28 | 620 | 3380 | 28 | 620 | 3380 |
| 29 | 670 | 3330 | 29 | 615 | 3385 |
| 30 | 680 | 3320 | 30 | 520 | 3480 |
| 31 | NV | | 31 | 510 | 3490 |
| 32 | 660 | 3340 | 32 | 500 | 3500 |
| 33 | 670 | 3330 | 33 | 485 | 3515 |
| 34 | 660 | 3340 | 34 | 480 | 3520 |
| 35 | 640 | 3360 | 35 | 500 | 3500 |
| 36 | 840 | 3160 | 36 | 570 | 3430 |
| 37 | 800 | 3200 | 37 | 615 | 3385 |
| 38 | 810 | 3190 | 38 | 620 | 3380 |
| 39 | 810 | 3190 | 39 | 615 | 3385 |
| 40 | 815 | 3185 | 40 | 585 | 3415 |
| 41 | 830 | 3170 | 41 | 585 | 3415 |
| 42 | 830 | 3170 | 42 | 625 | 3375 |
| 43 | 820 | 3180 | 43 | 655 | 3345 |
| 44 | 815 | 3185 | 44 | 630 | 3370 |
| 45 | 810 | 3190 | 45 | 605 | 3395 |
| 46 | 760 | 3240 | 46 | 630 | 3370 |
| 47 | 780 | 3220 | 47 | 665 | 3335 |
| 48 | 765 | 3235 | 48 | 620 | 3380 |
| 49 | 750 | 3250 | 49 | 605 | 3395 |
| 50 | 735 | 3265 | 50 | 585 | 3415 |


TABLE I


Depths - Mapped Horizon
Soda Lake Area


Line SL-7

| Sta. No. | Depth | Elevation | Sta. No. | Depth | Elevation |
|----------|-------|-----------|----------|-------|-----------|
| 1 | NV | | 48 | 410 | 3590 |
| 2 | 750 | 3250 | 49 | 415 | 3585 |
| 3 | 680 | 3320 | 50 | 420 | 3580 |
| 4 | 645 | 3355 | 51 | 445 | 3555 |
| 5 | 625 | 3375 | 52 | 360 | 3640 |
| 6 | 580 | 3420 | 53 | 315 | 3685 |
| 7 | 550 | 3450 | 54 | 300 | 3700 |
| 8 | 550 | 3450 | 55 | 270 | 3730 |
| 9 | 540 | 3460 | 56 | 255 | 3745 |
| 10 | 540 | 3460 | 57 | 265 | 3735 |
| 11 | 555 | 3445 | | | |
| 12 | 600 | 3400 | | | |
| 13 | 610 | 3390 | | | |
| 14 | 610 | 3390 | | | |
| 15 | 610 | 3390 | | | |
| 16 | 610 | 3390 | | | |
| 17 | 610 | 3390 | | | |
| 18 | NV | | | | |
| 19 | NV | | | | |
| 20 | 350 | 3650 | | | |
| 21 | 405 | 3595 | | | |
| 22 | 450 | 3550 | | | |
| 23 | 475 | 3525 | | | |
| 24 | 495 | 3505 | | | |
| 25 | 525 | 3475 | | | |
| 26 | 350 | 3650 | | | |
| 27 | 360 | 3640 | | | |
| 28 | 375 | 3625 | | | |
| 29 | 380 | 3620 | | | |
| 30 | 385 | 3615 | | | |
| 31 | 560 | 3440 | | | |
| 32 | 560 | 3440 | | | |
| 33 | 540 | 3460 | | | |
| 34 | 545 | 3455 | | | |
| 35 | 560 | 3440 | | | |
| 36 | 550 | 3450 | | | |
| 37 | 480 | 3520 | | | |
| 38 | 470 | 3530 | | | |
| 39 | 450 | 3550 | | | |
| 40 | 445 | 3555 | | | |
| 41 | 435 | 3565 | | | |
| 42 | 415 | 3585 | | | |
| 43 | 400 | 3600 | | | |
| 44 | 445 | 3555 | | | |
| 45 | 410 | 3590 | | | |
| 46 | 400 | 3600 | | | |
| 47 | 405 | 3595 | | | |

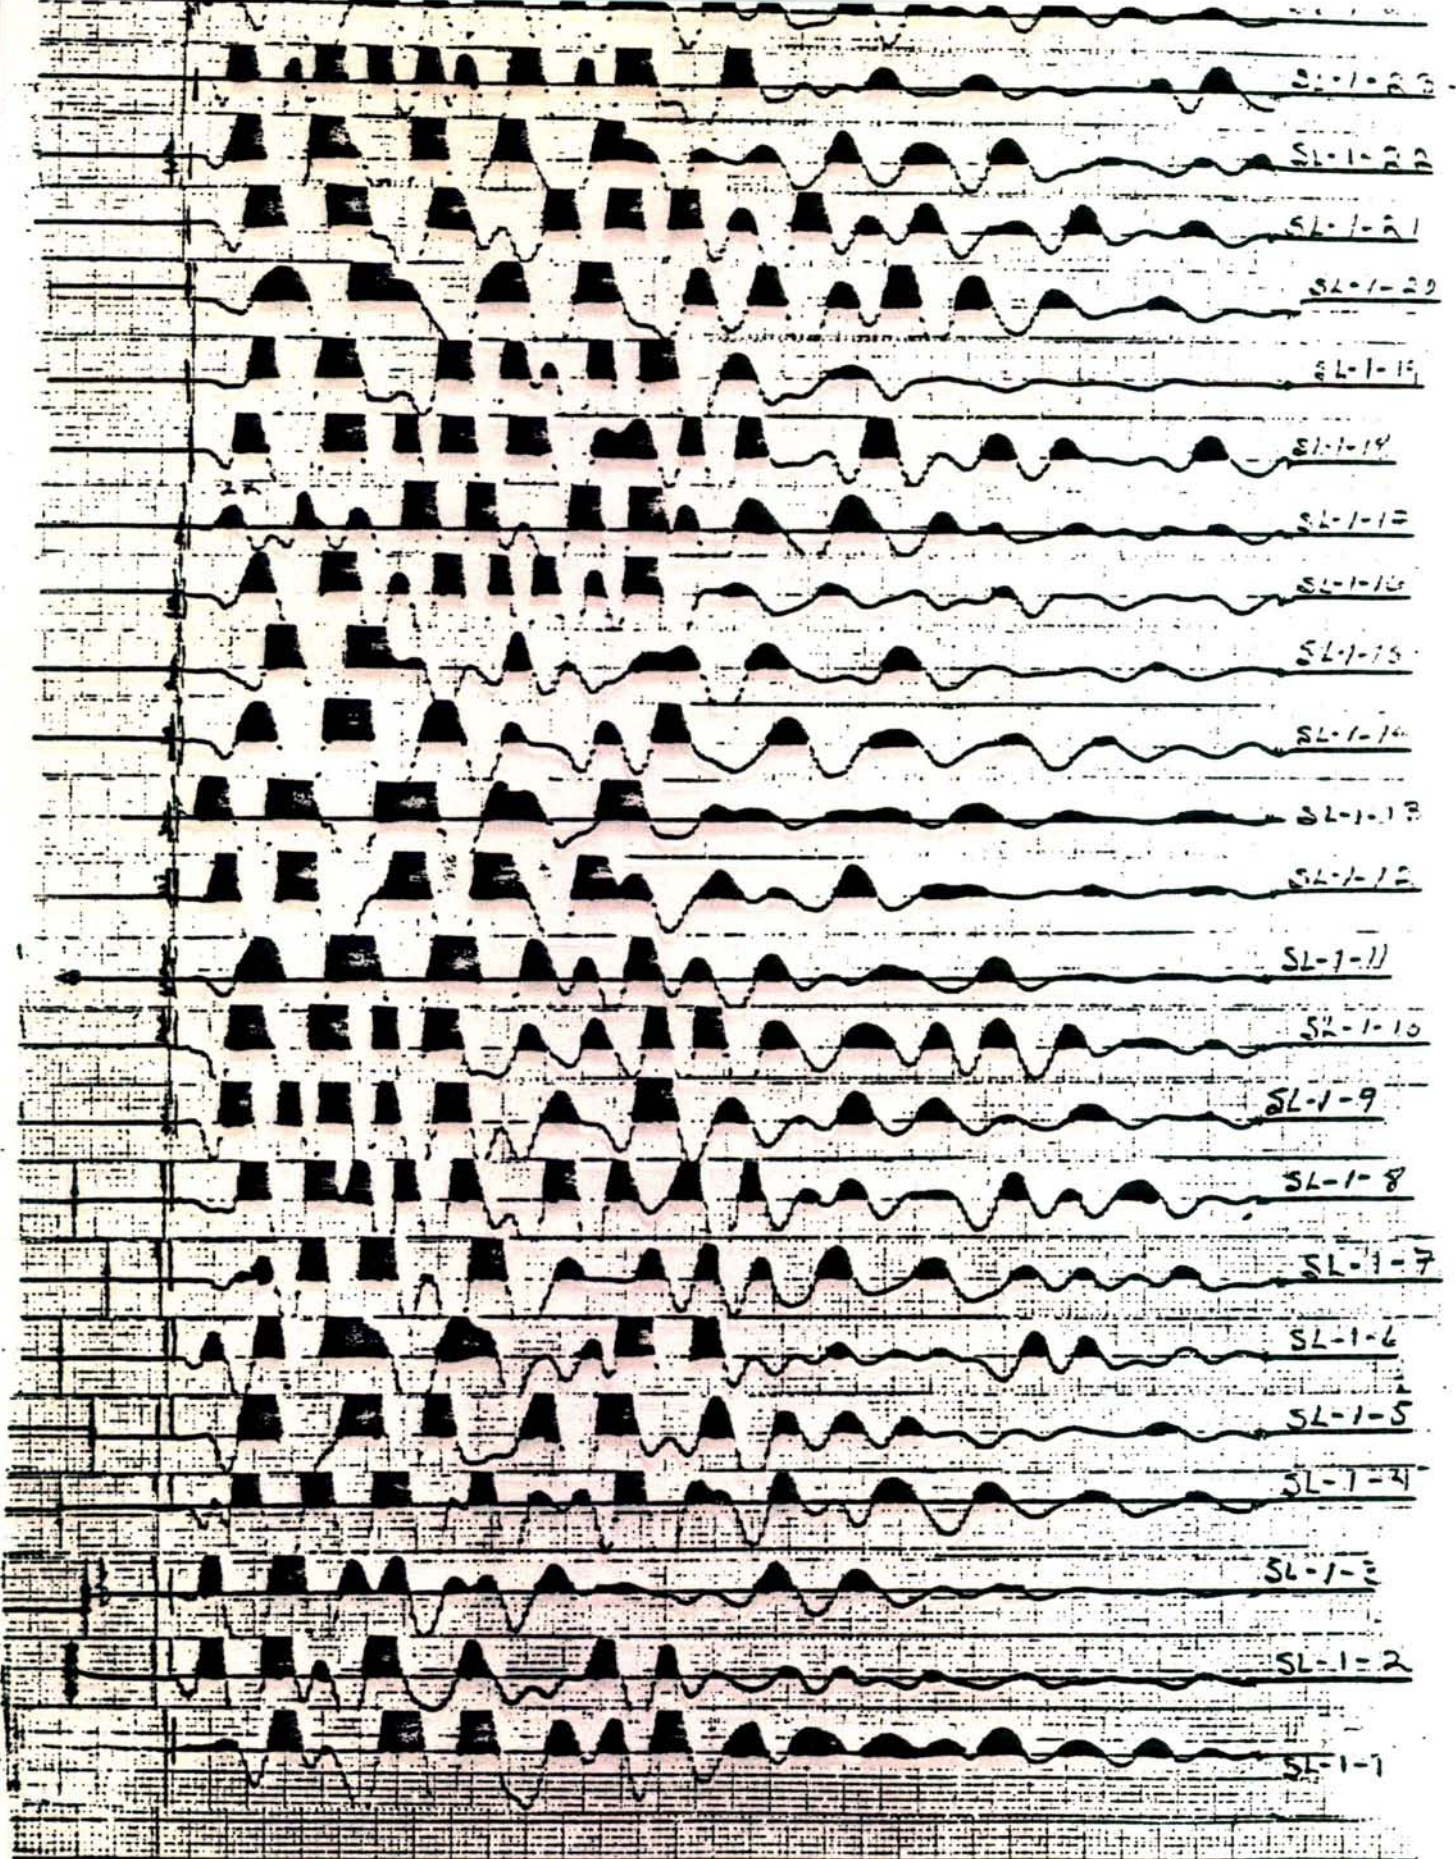

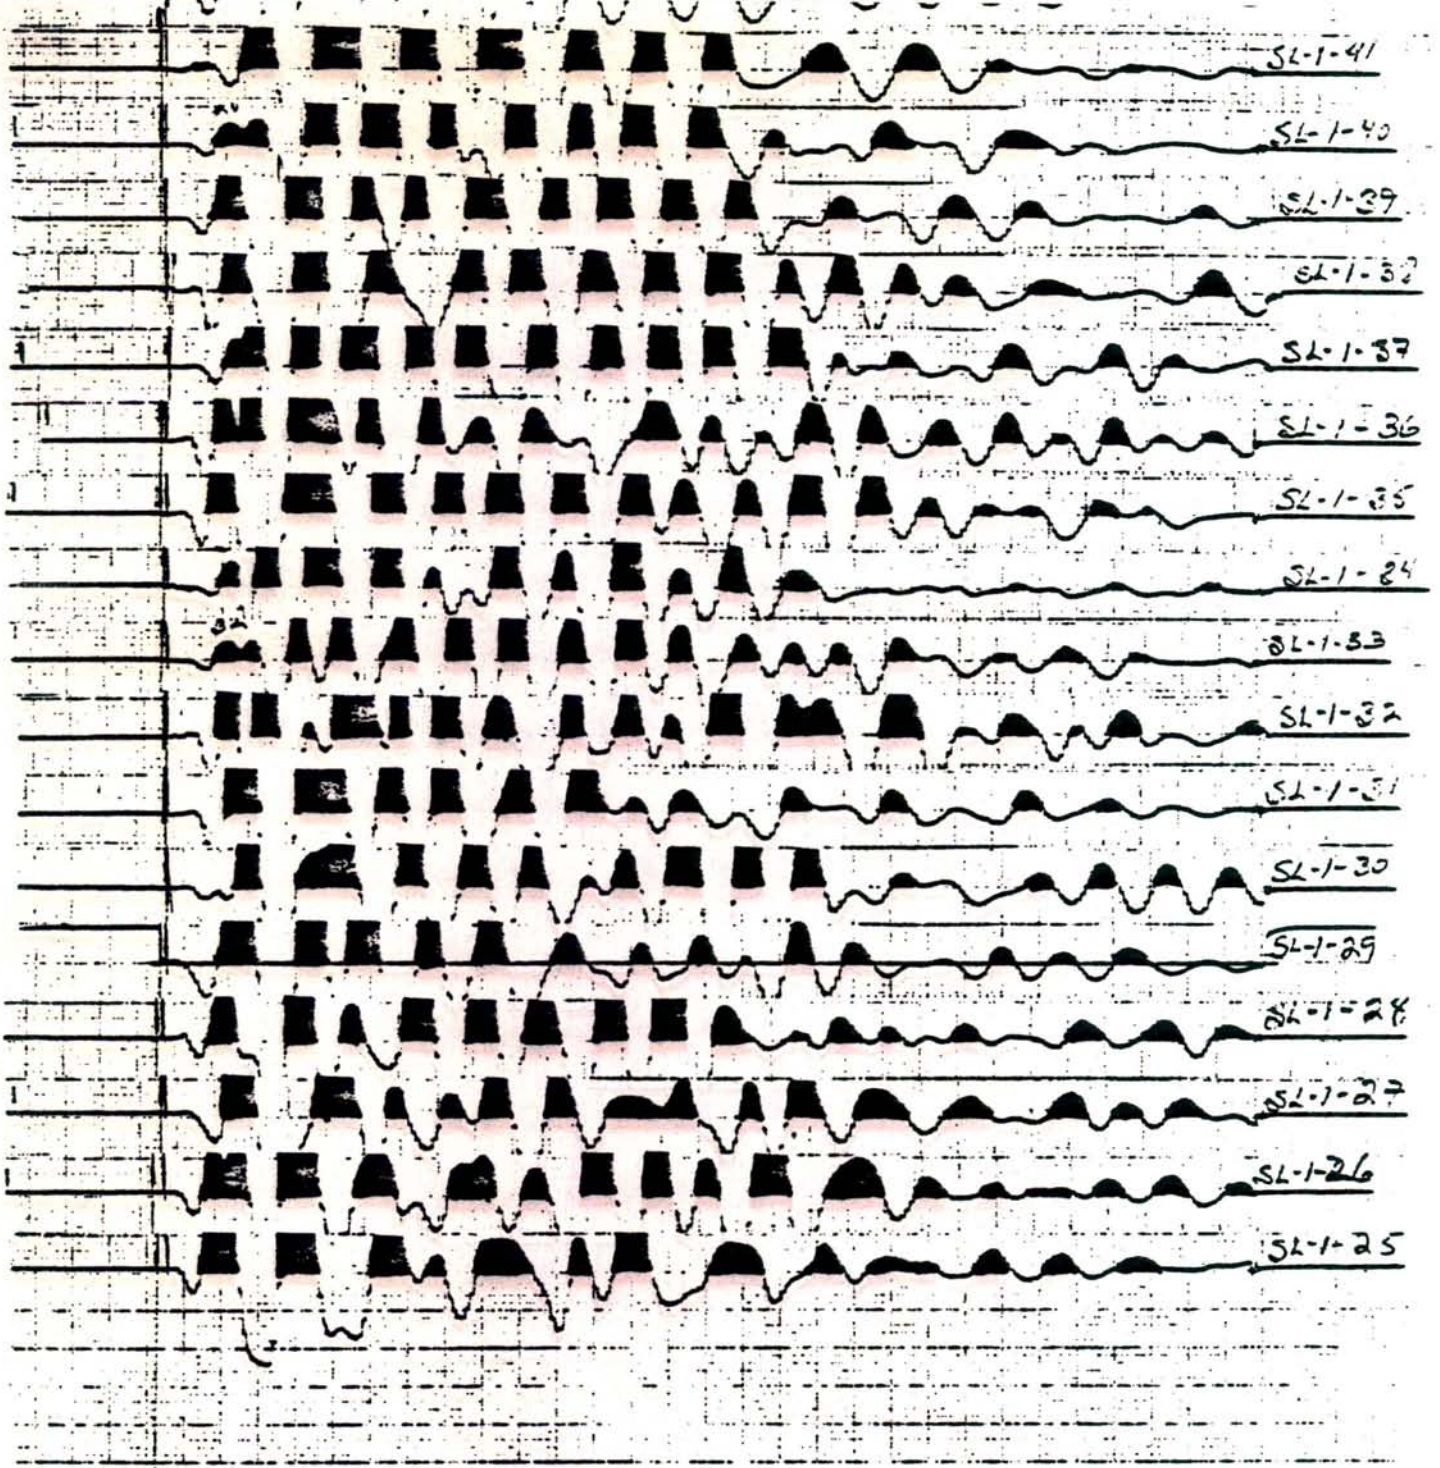

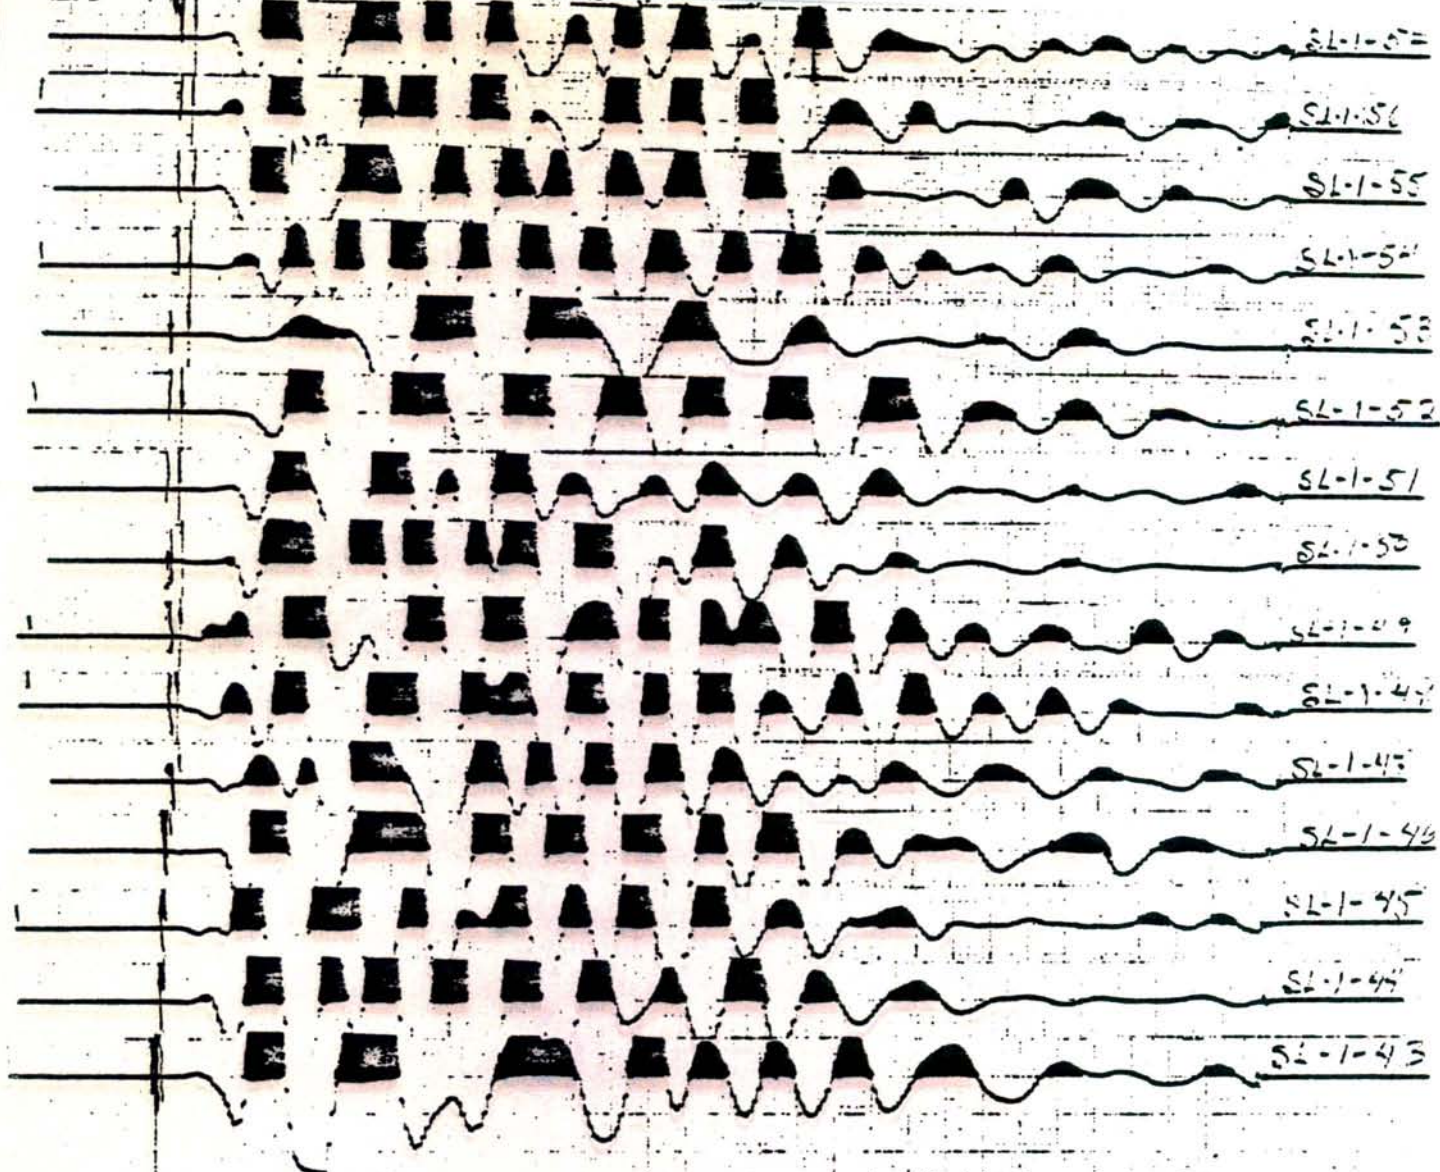

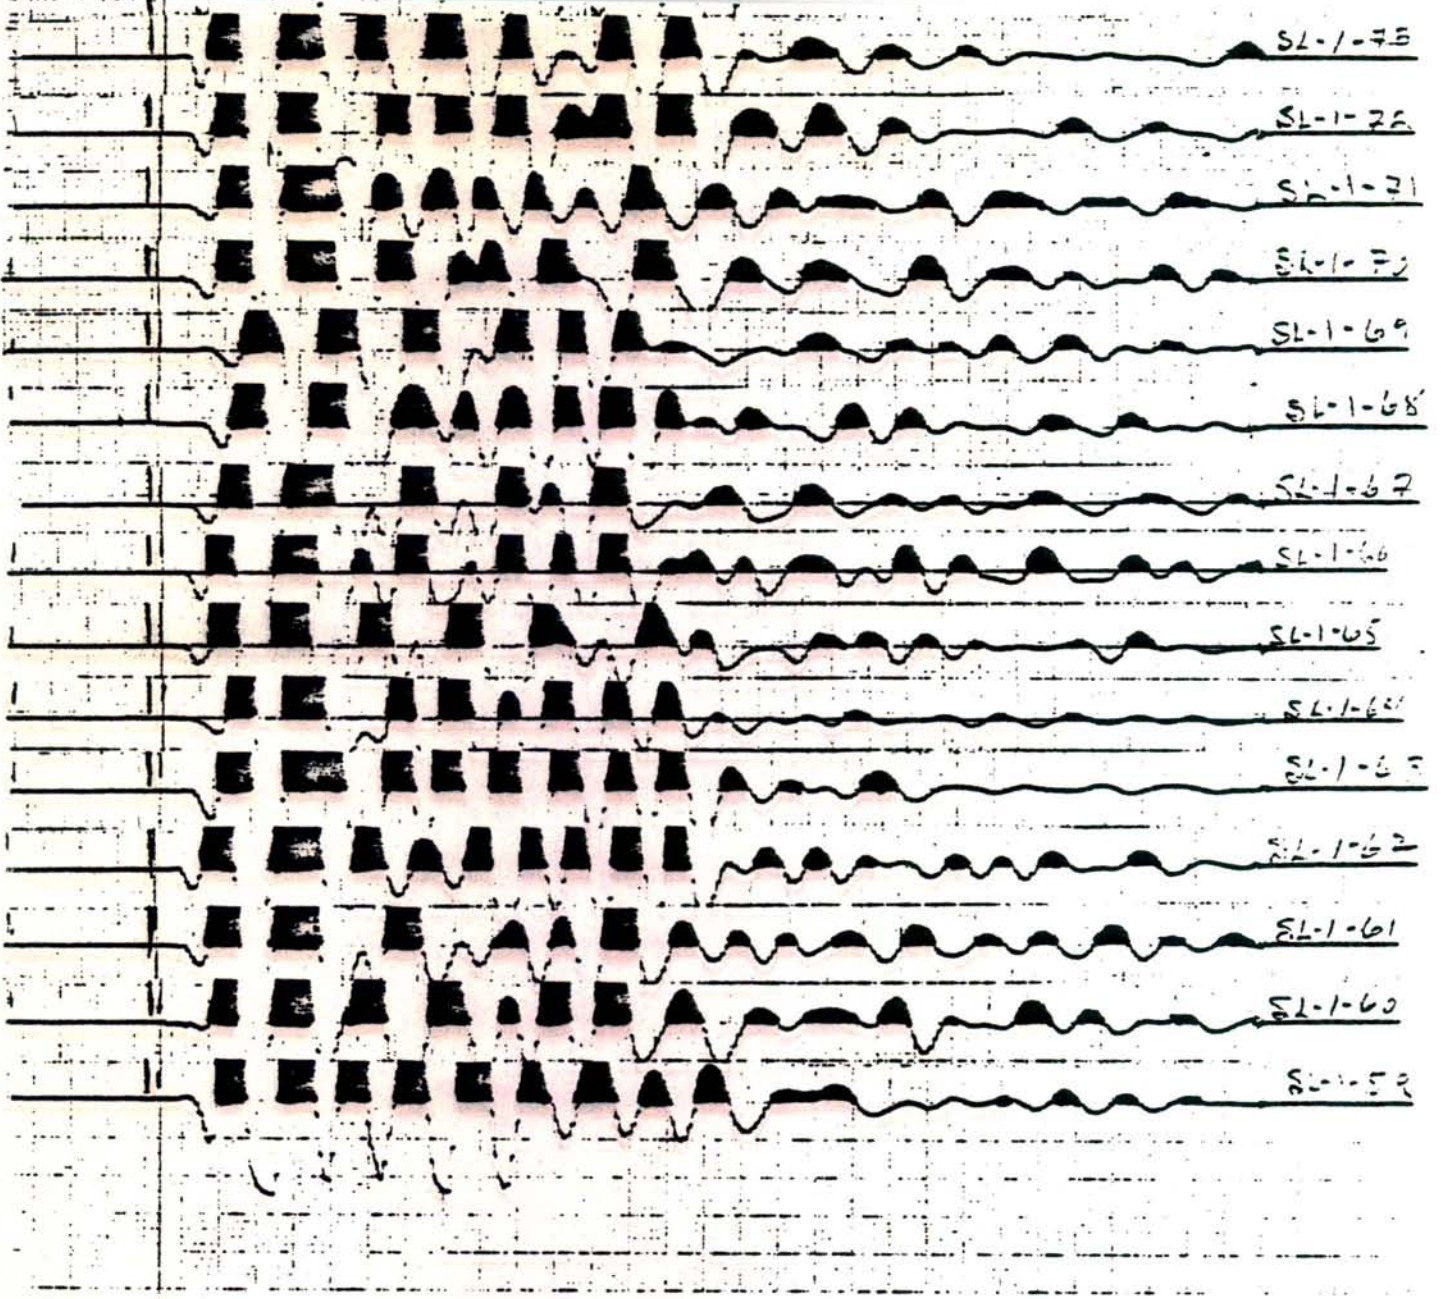

SL-1-75

SL-1-74

SL-1-73

SL-1-72

SL-1-69

SL-1-68

SL-1-67

SL-1-66

SL-1-65

SL-1-64

SL-1-63


SL-1-62

SL-1-61


SL-1-60


SL-1-52

1971 1 24 101

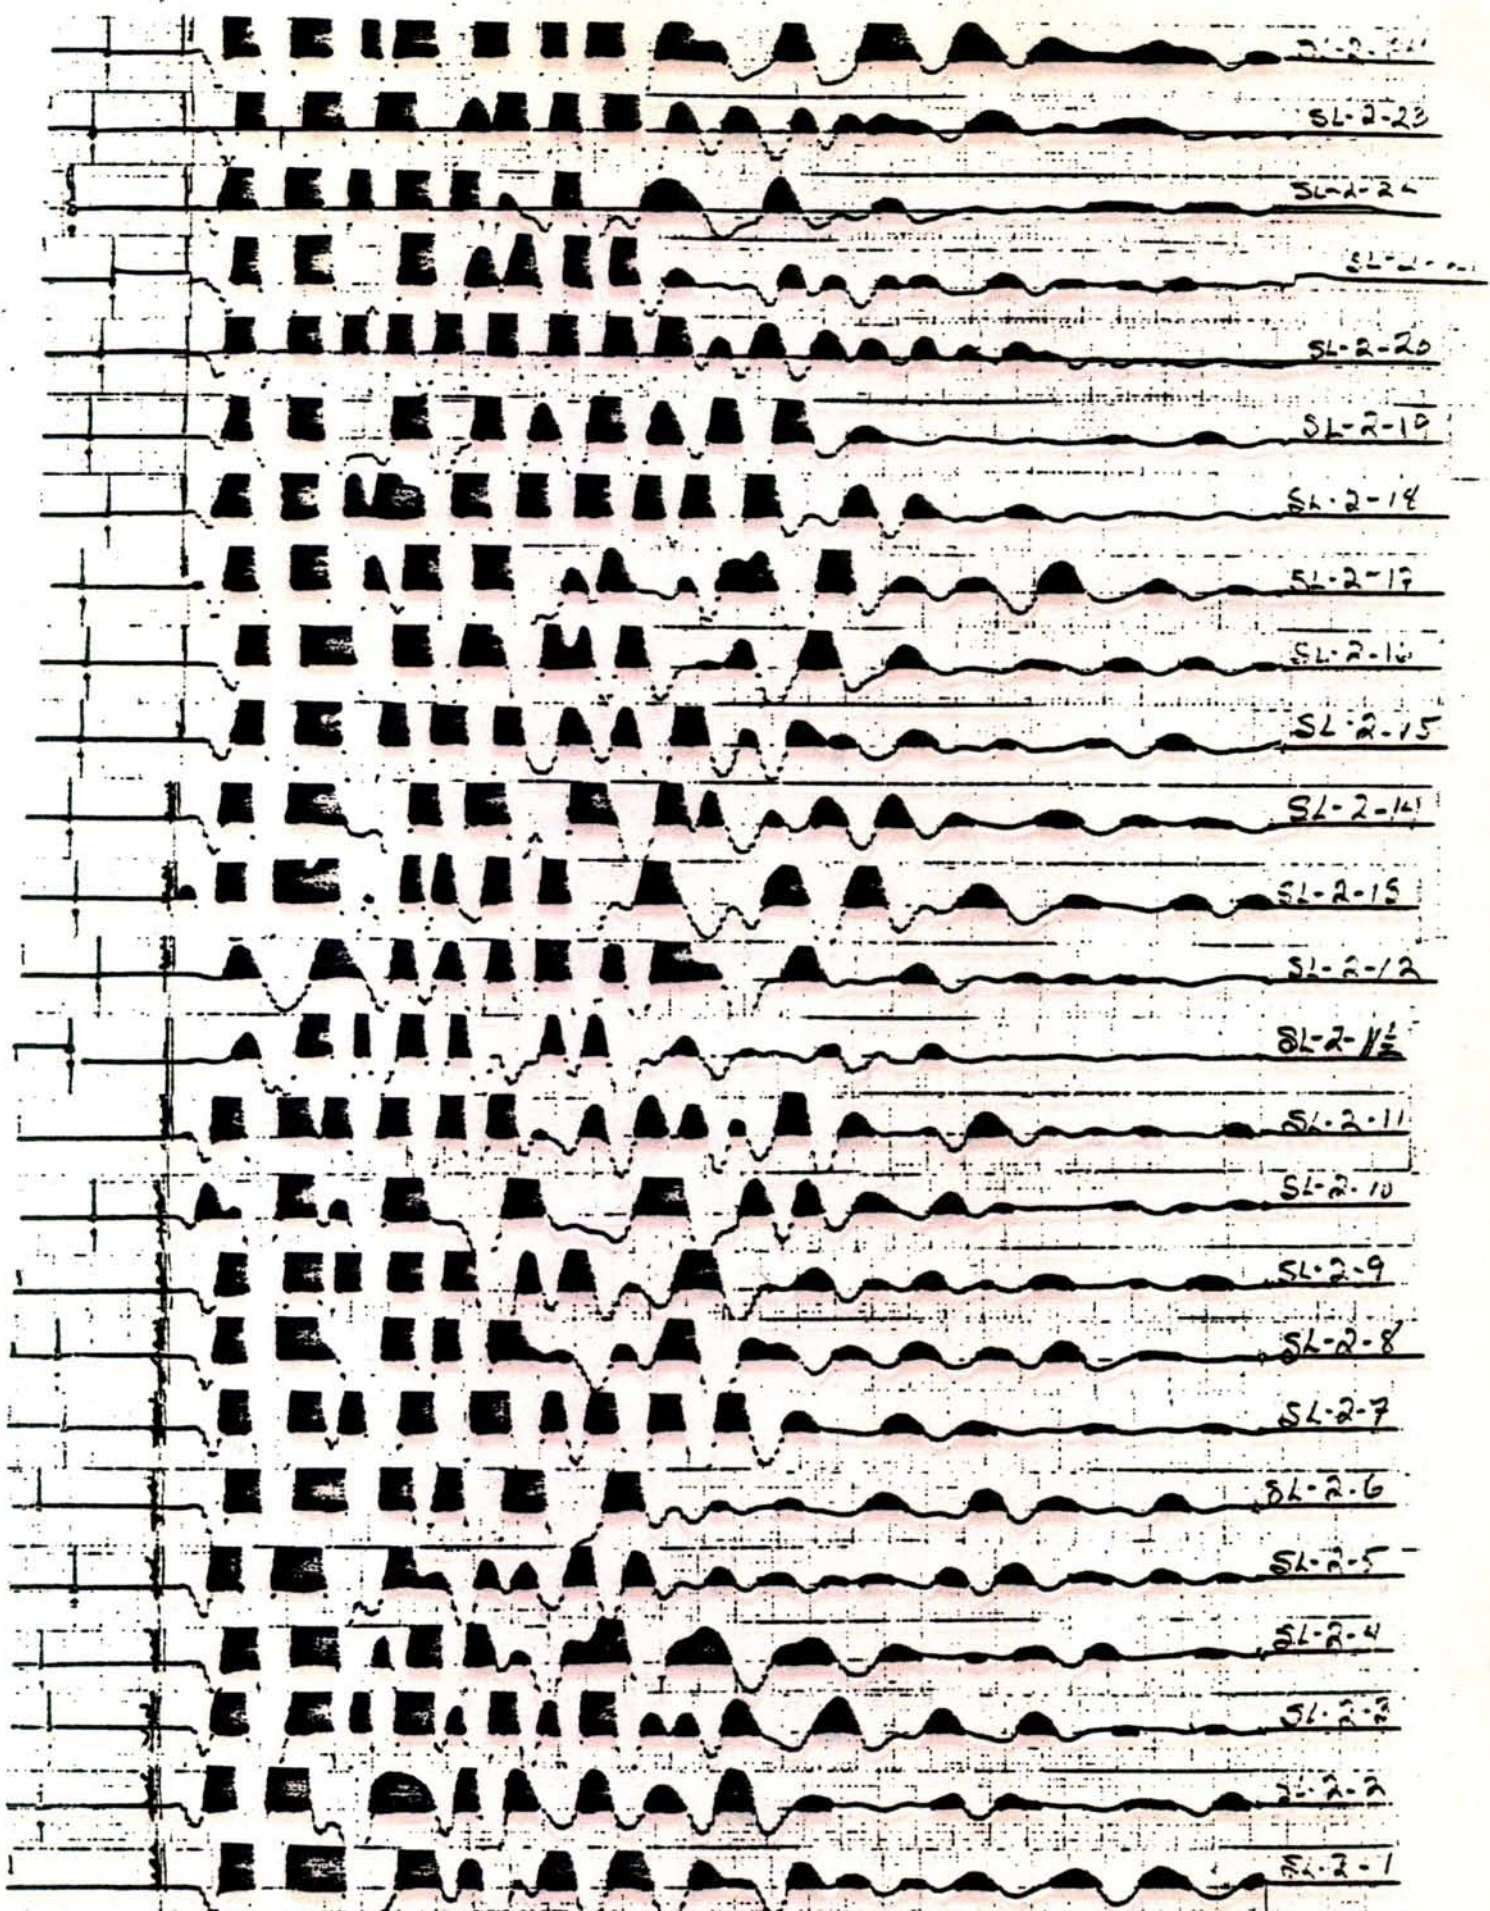

0.5 sec

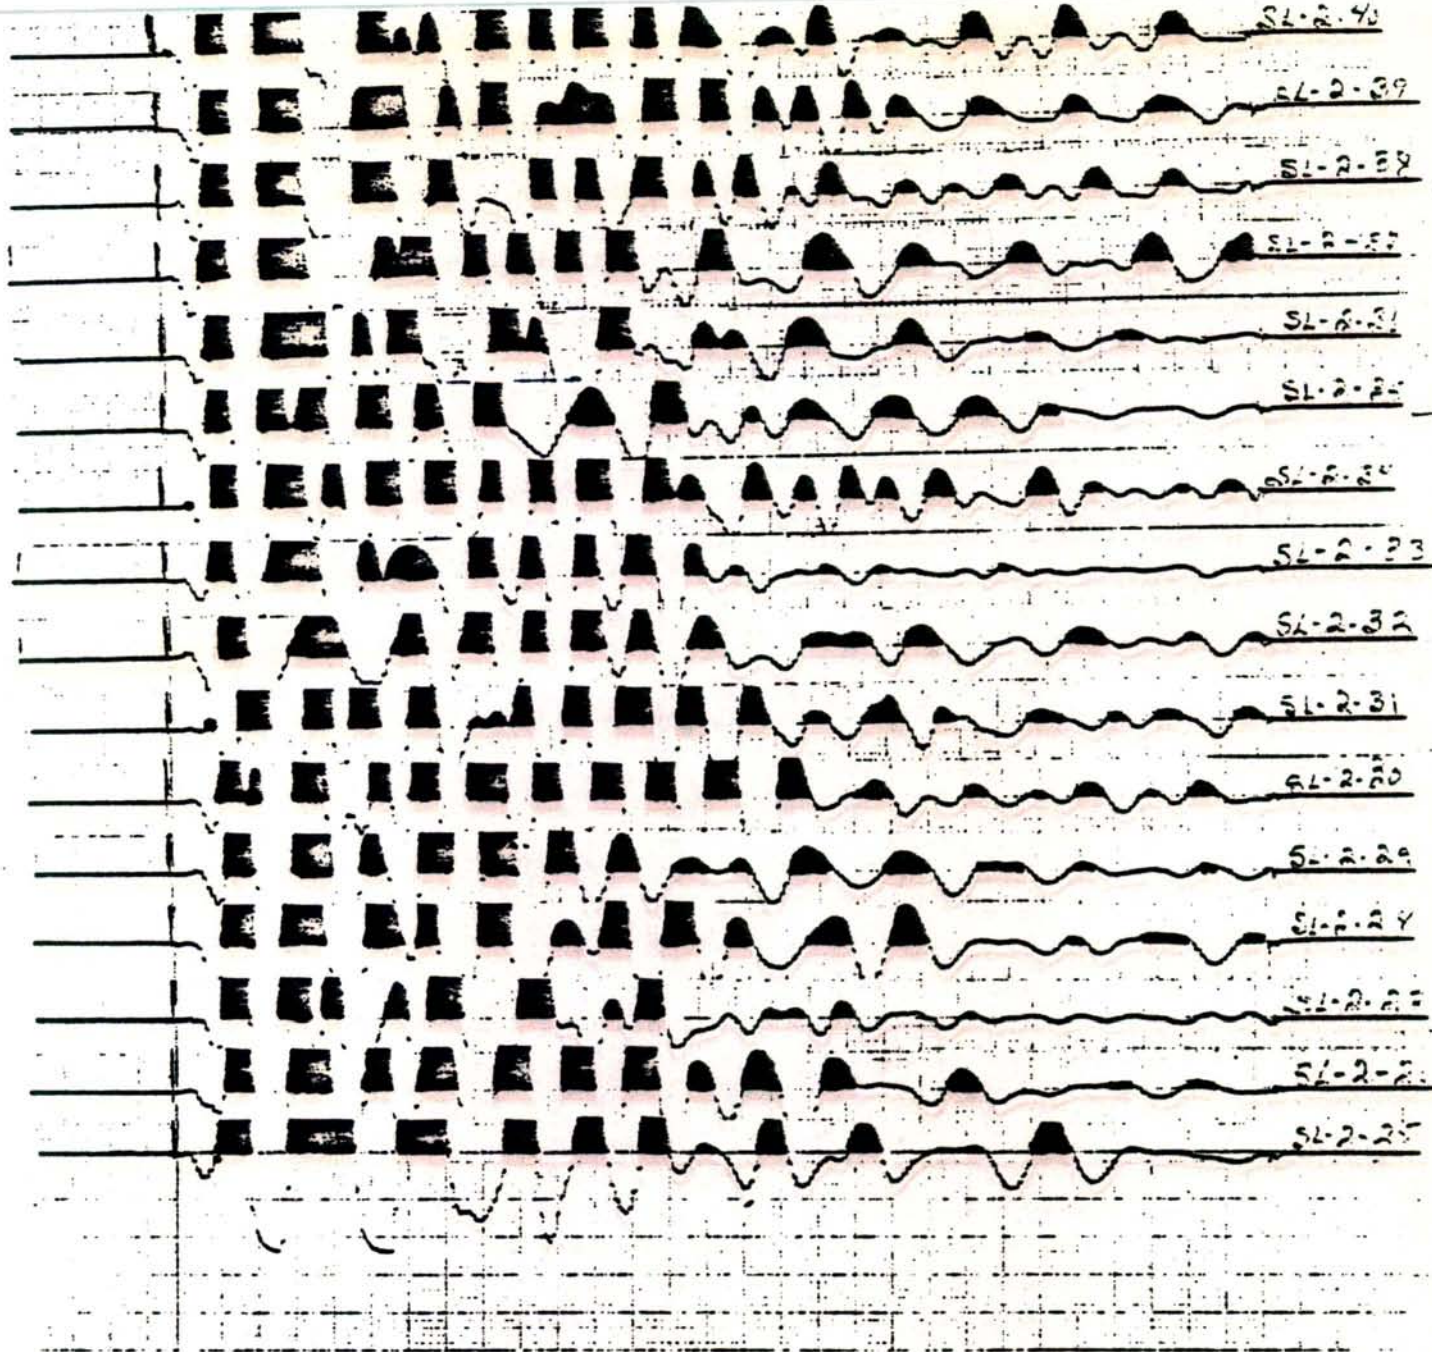

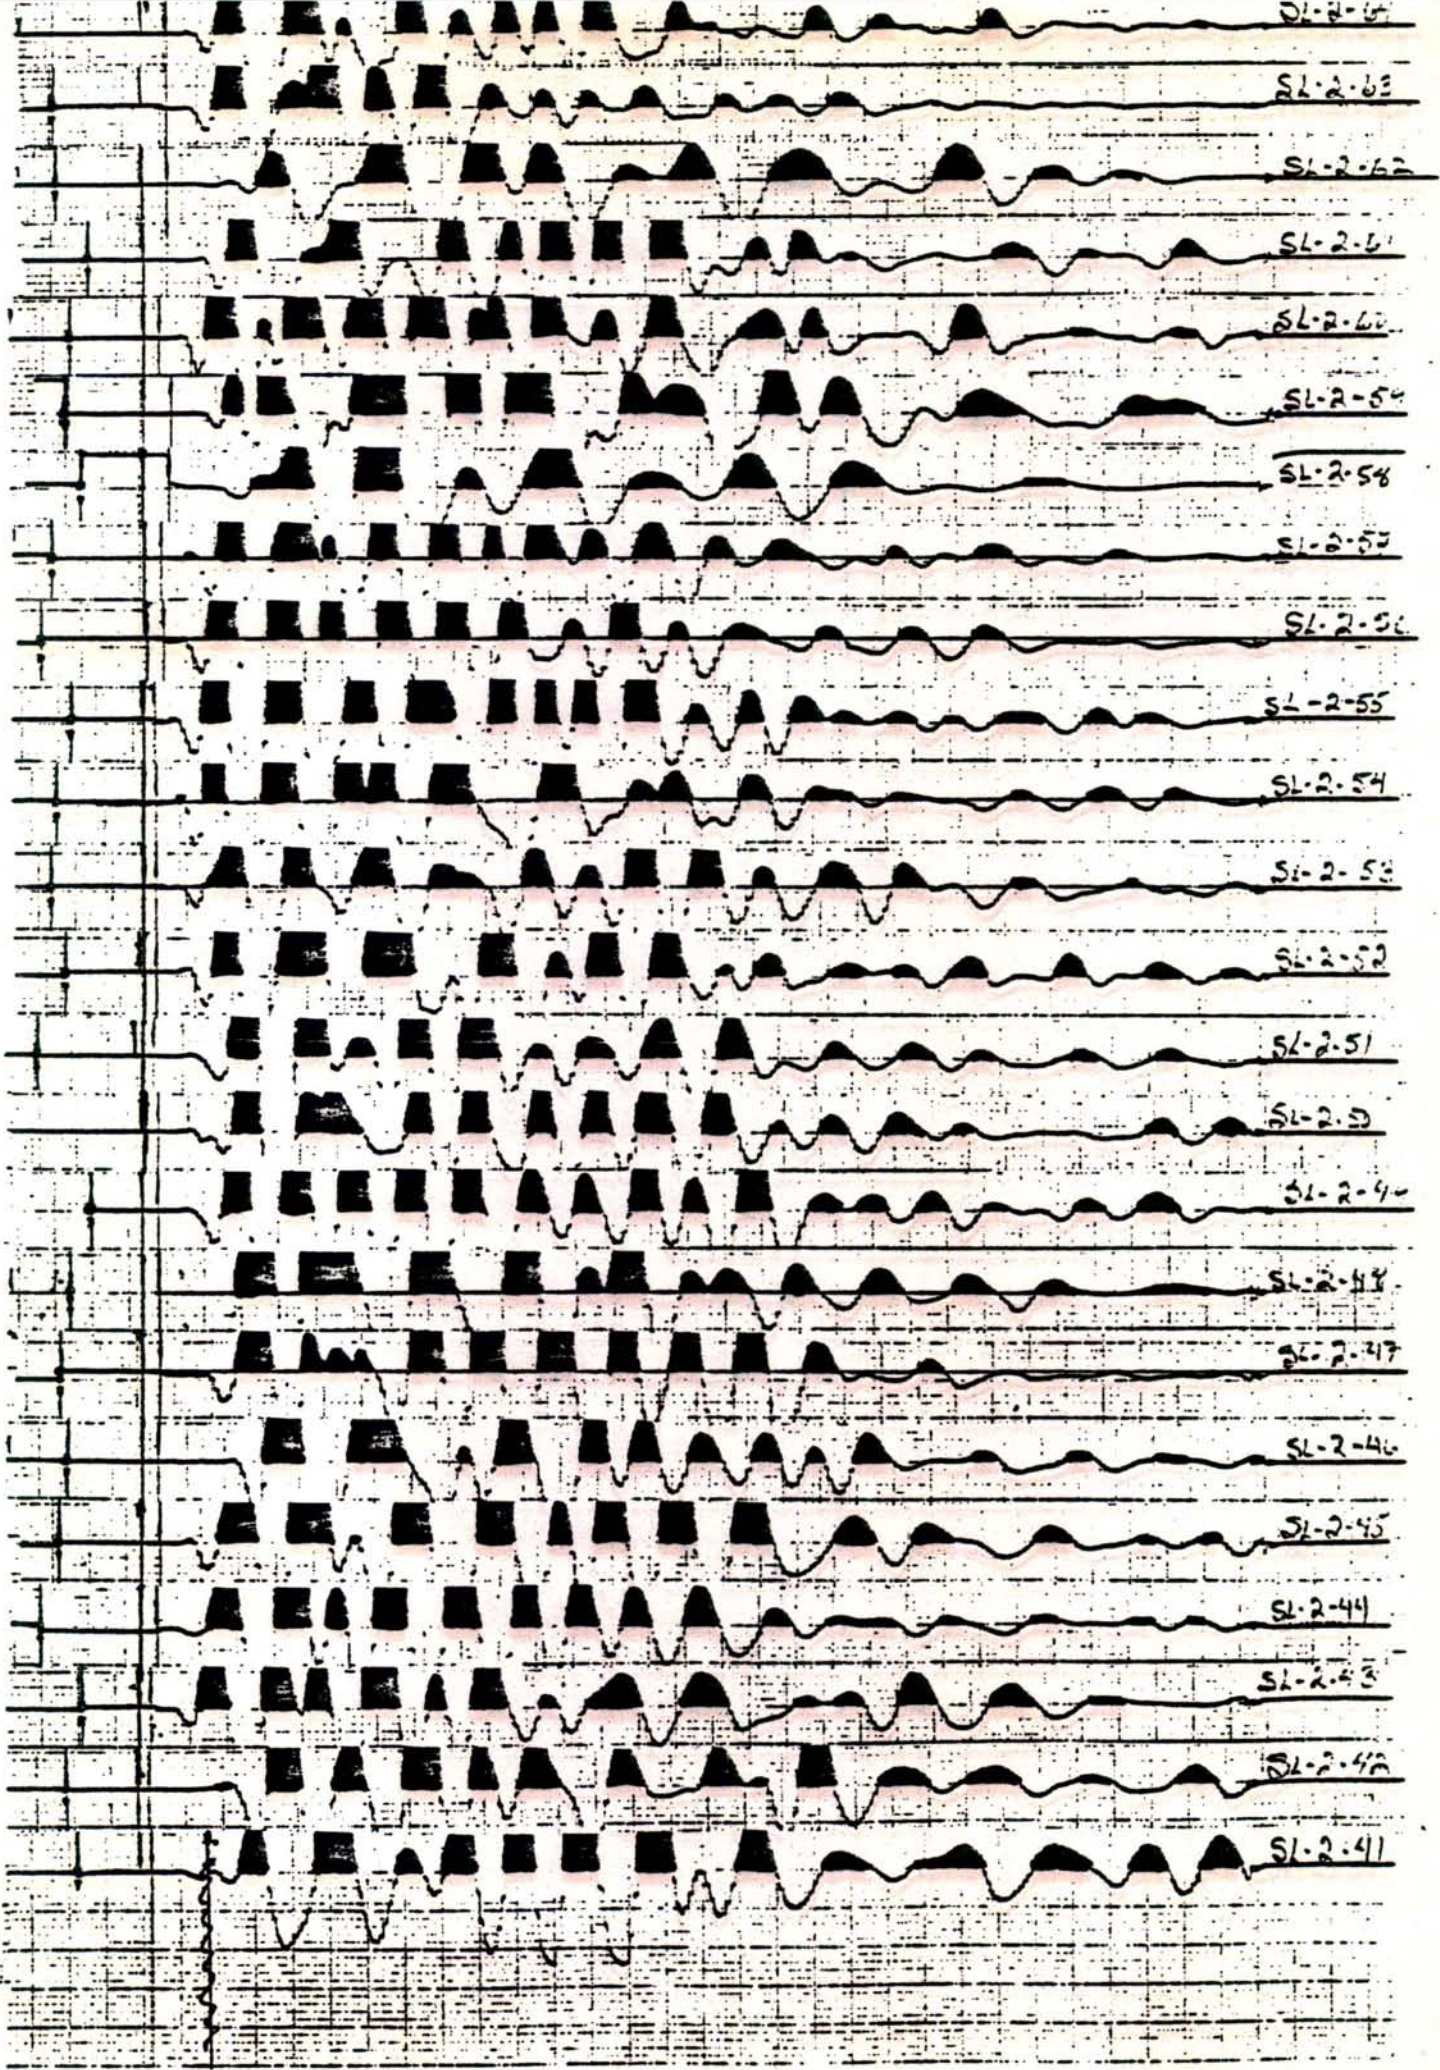

SL-2-61

SL-2-62

SL-2-63

SL-2-64

SL-2-65

SL-2-66

SL-2-67

SL-2-68

SL-2-69

SL-2-70

SL-2-71

SL-2-72

SL-2-73

SL-2-74

SL-2-75

SL-2-76

SL-2-77

SL-2-78

SL-2-79

SL-2-80

SL-2-81

SL-2-82

SL-2-83

SL-2-84


SL-2-85


SL-2-86


SL-2-87

SL-2-88

SL-2-89

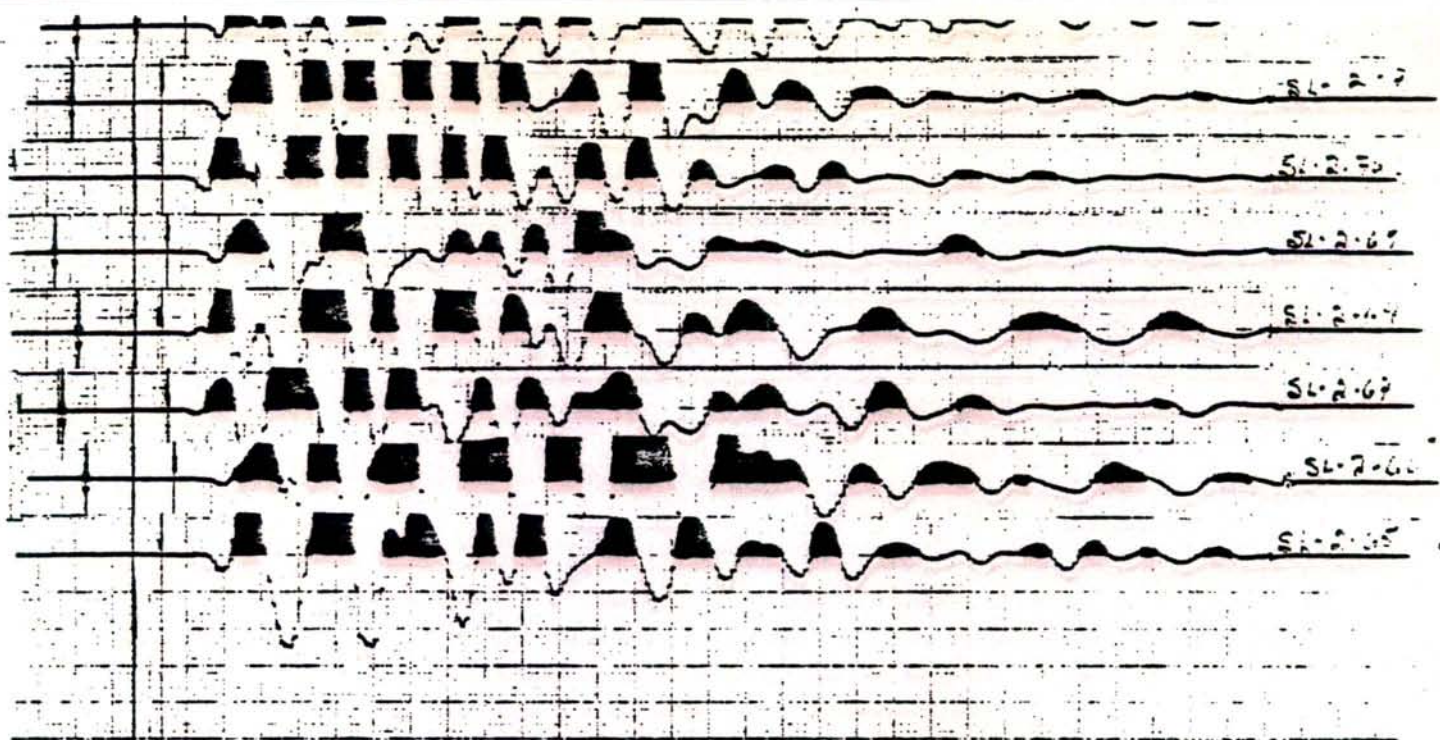


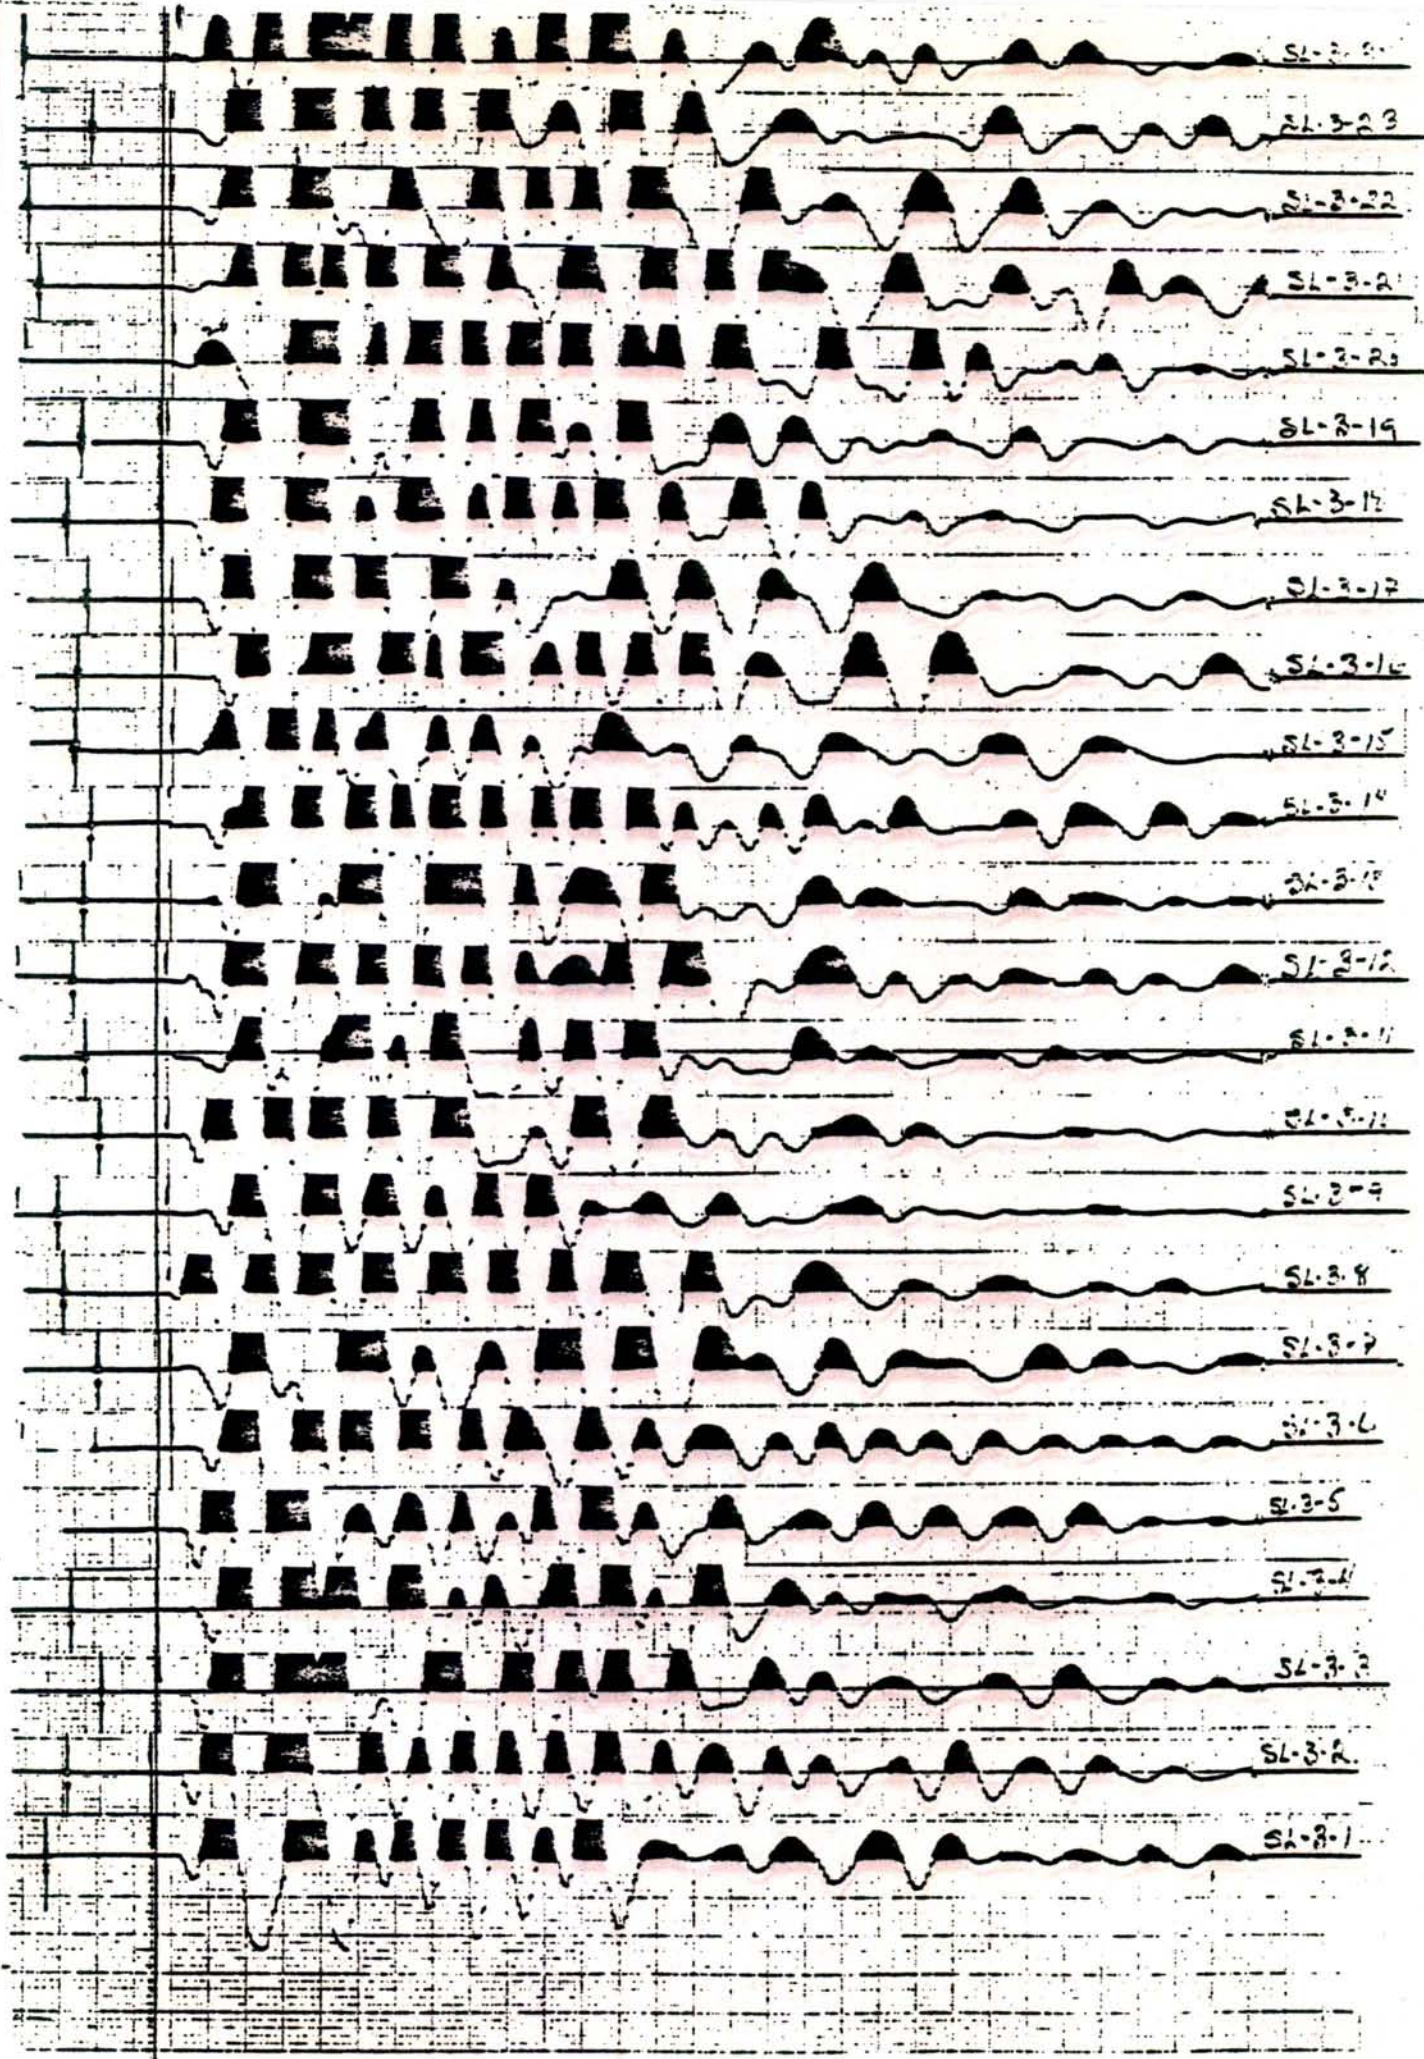


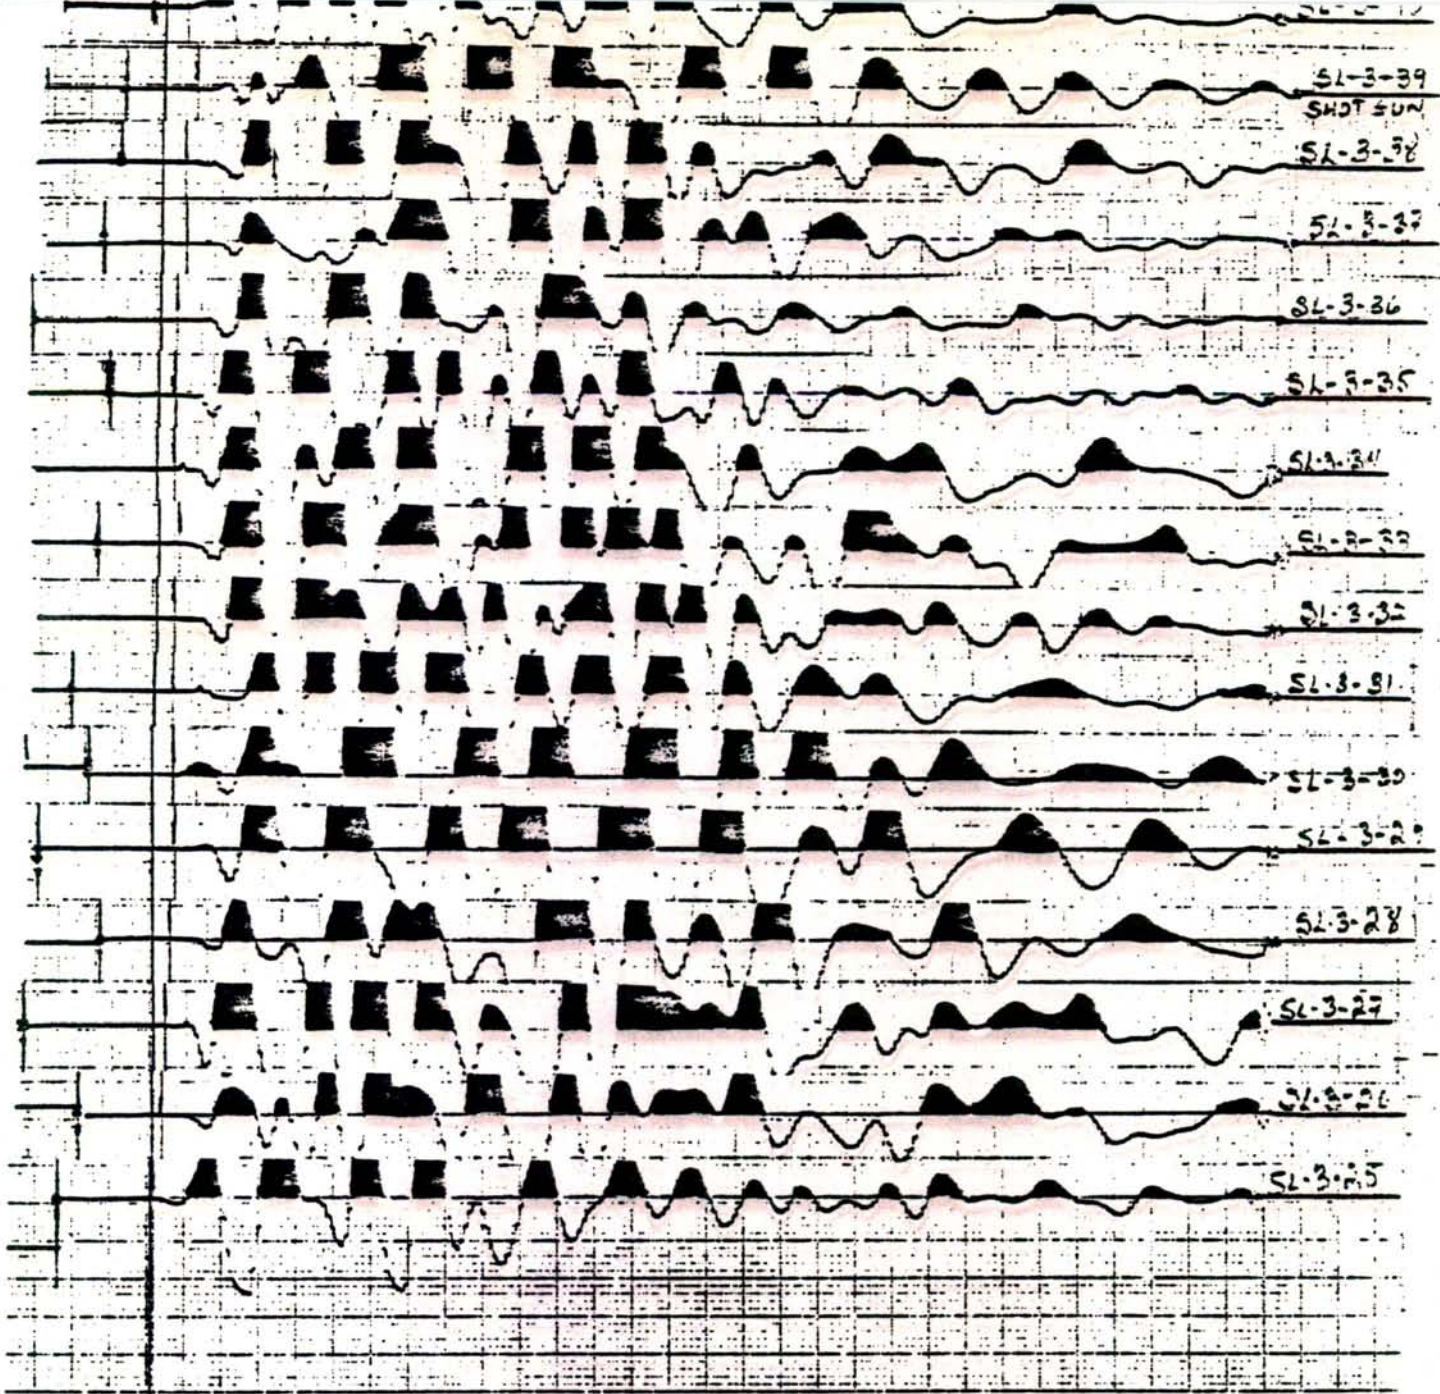


NO. 354-151

PRINTED IN U.S.A.

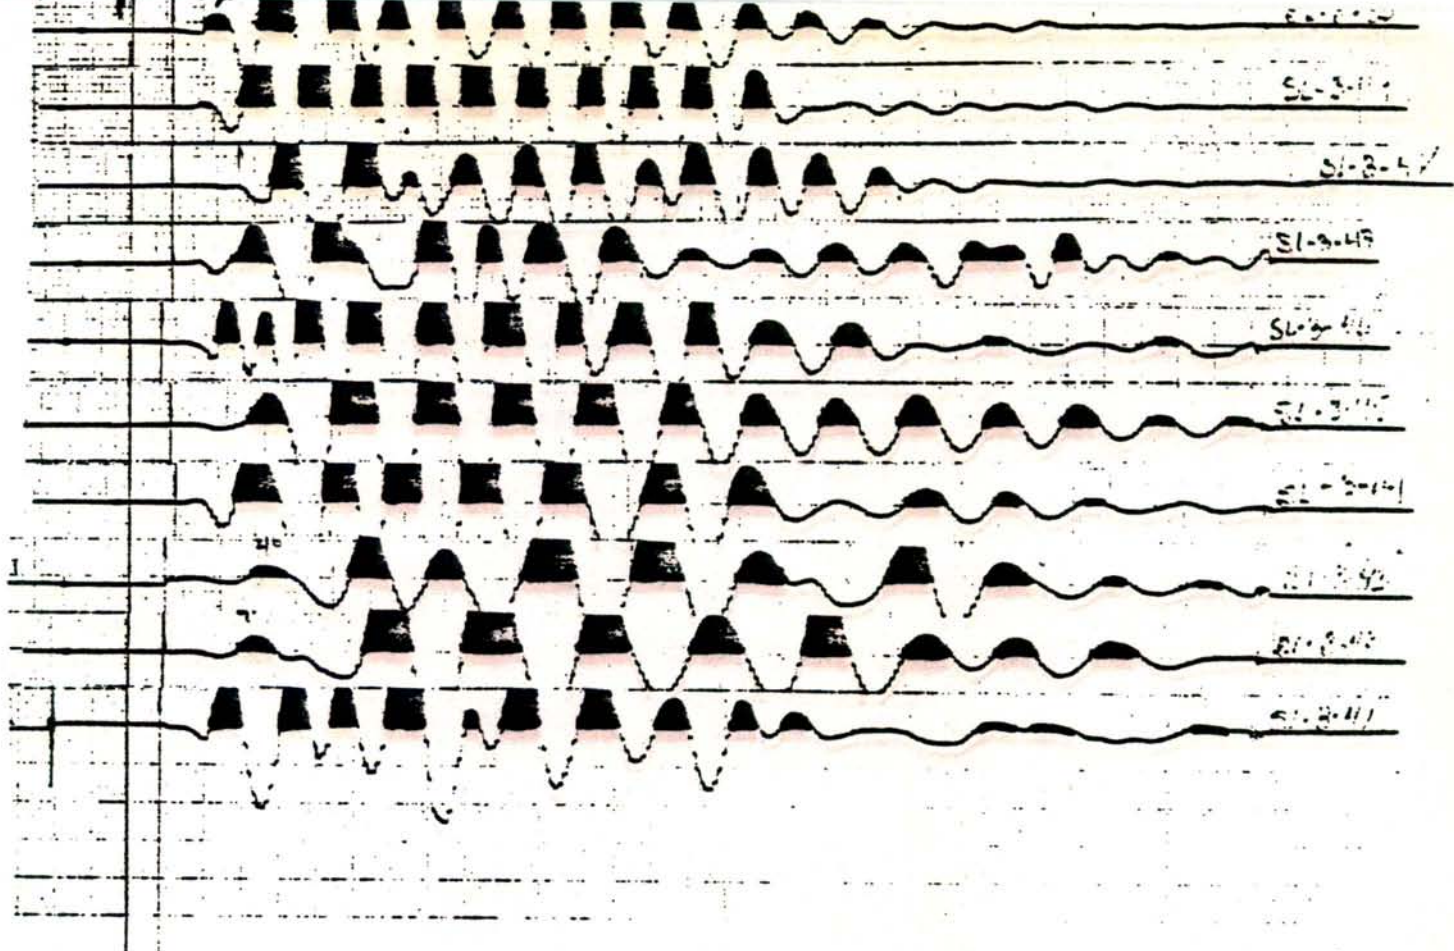

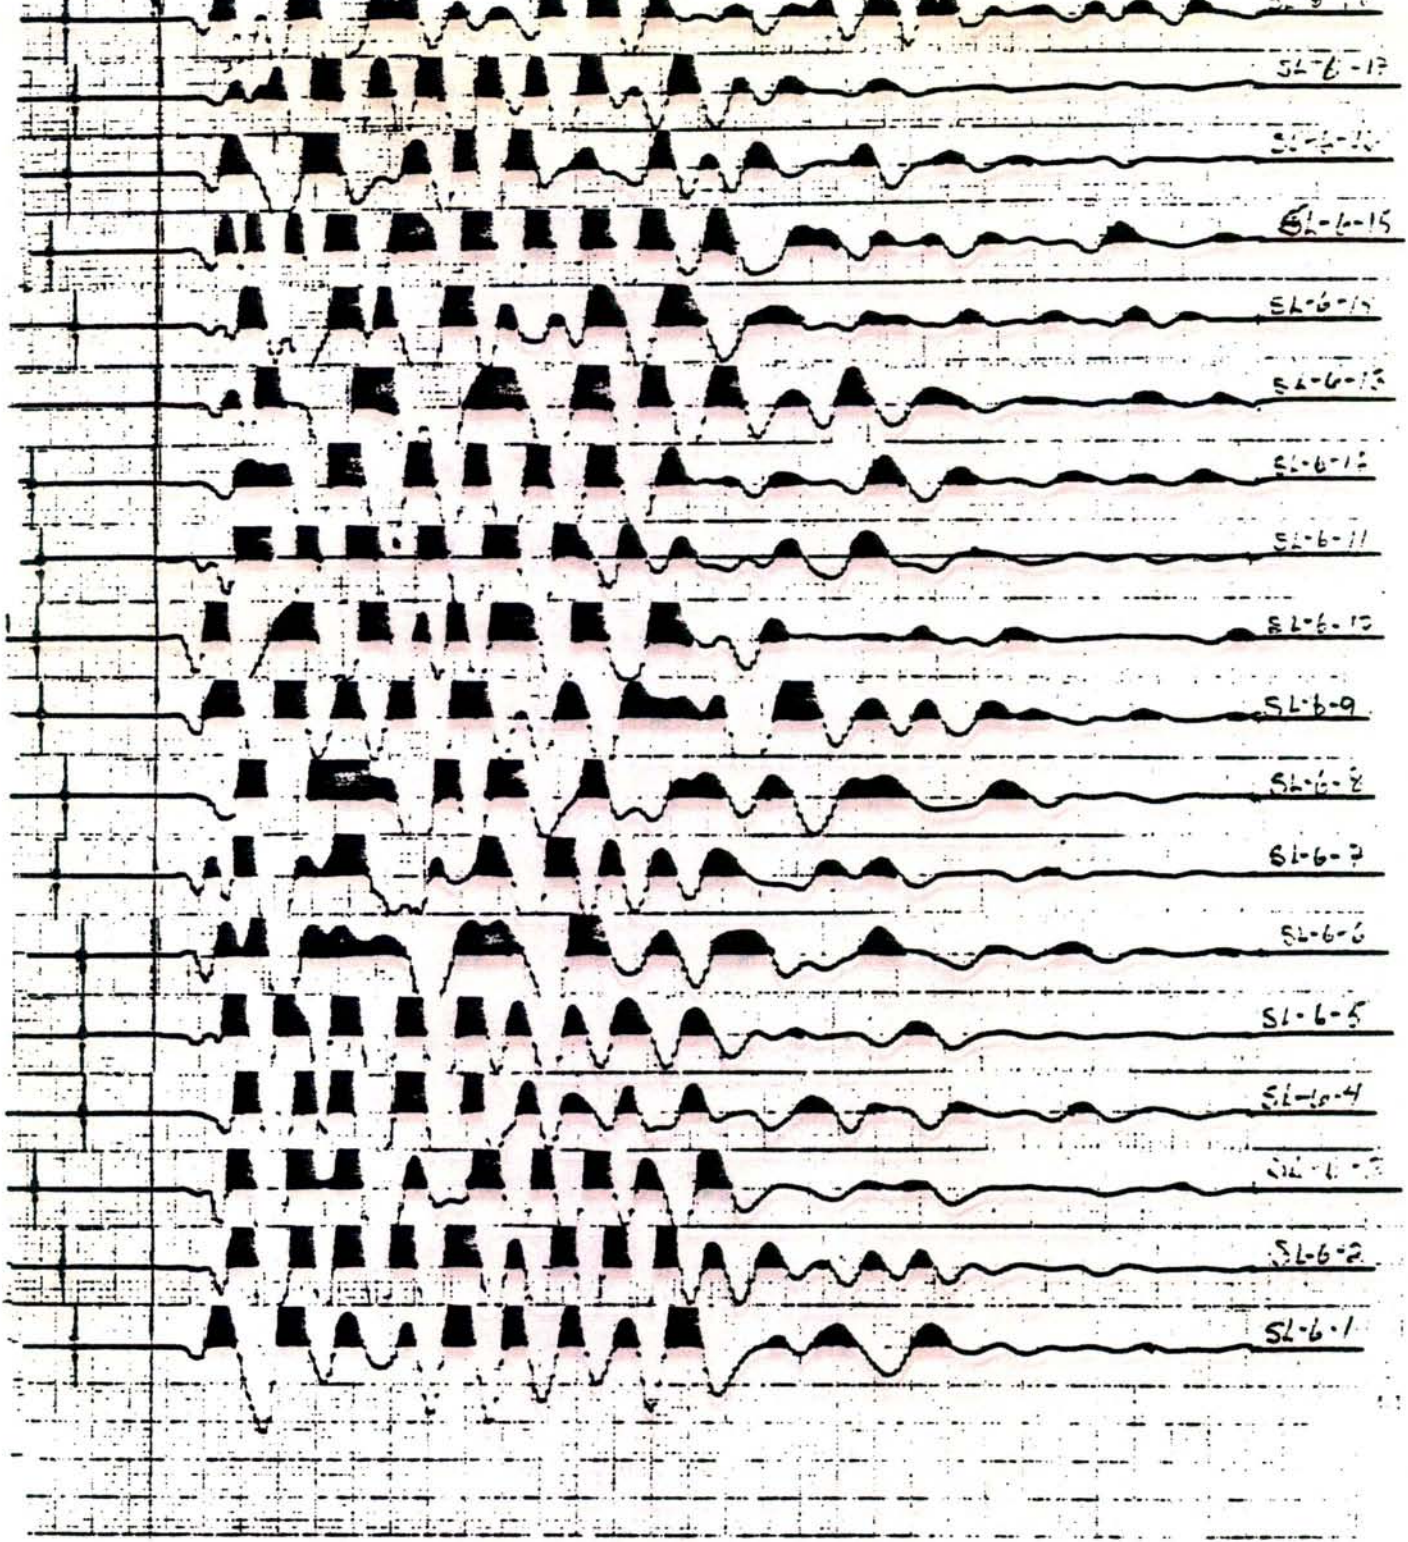

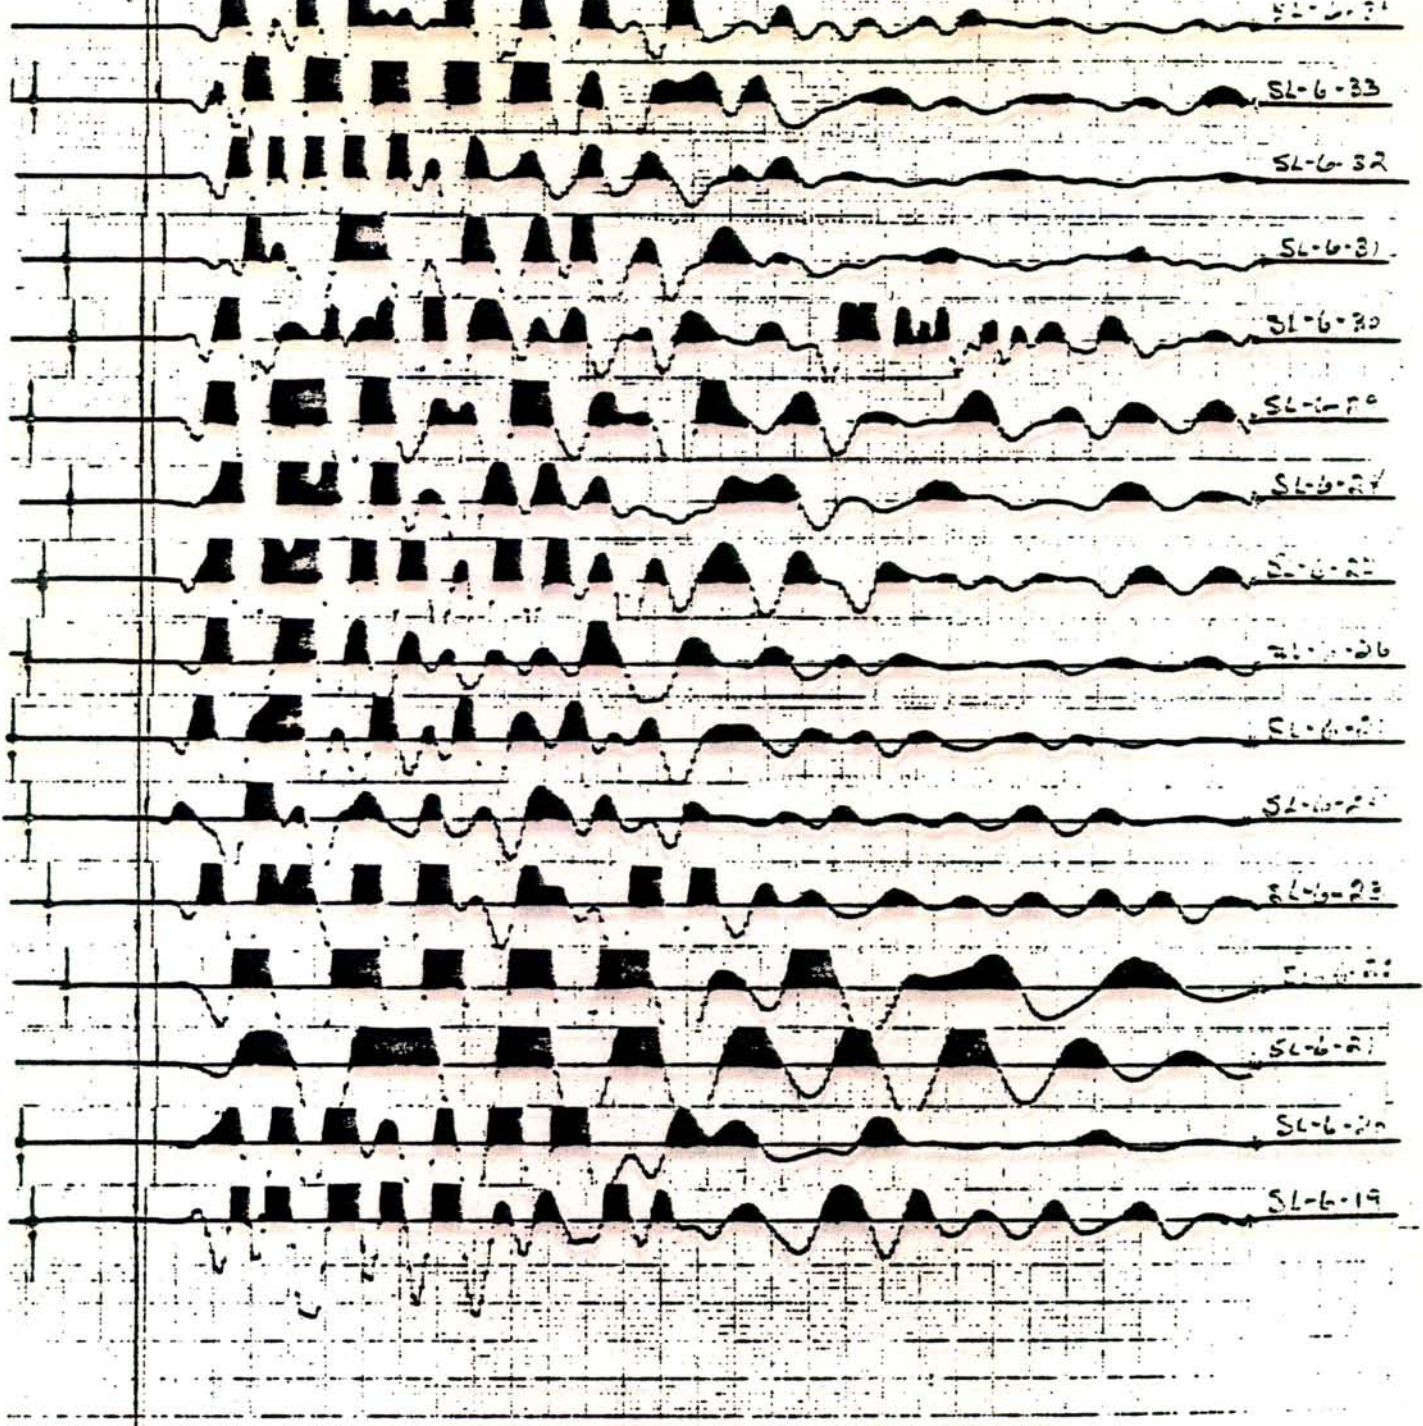

SL-6-33

SL-6-32

SL-6-31

SL-6-30

SL-6-29

SL-6-28

SL-6-27

SL-6-26

SL-6-25

SL-6-24

SL-6-23


SL-6-22


SL-6-21

SL-6-20

SL-6-19


Vertical text on the right edge of the page, possibly a page number or reference code, appearing as a series of small characters and a larger number at the bottom.

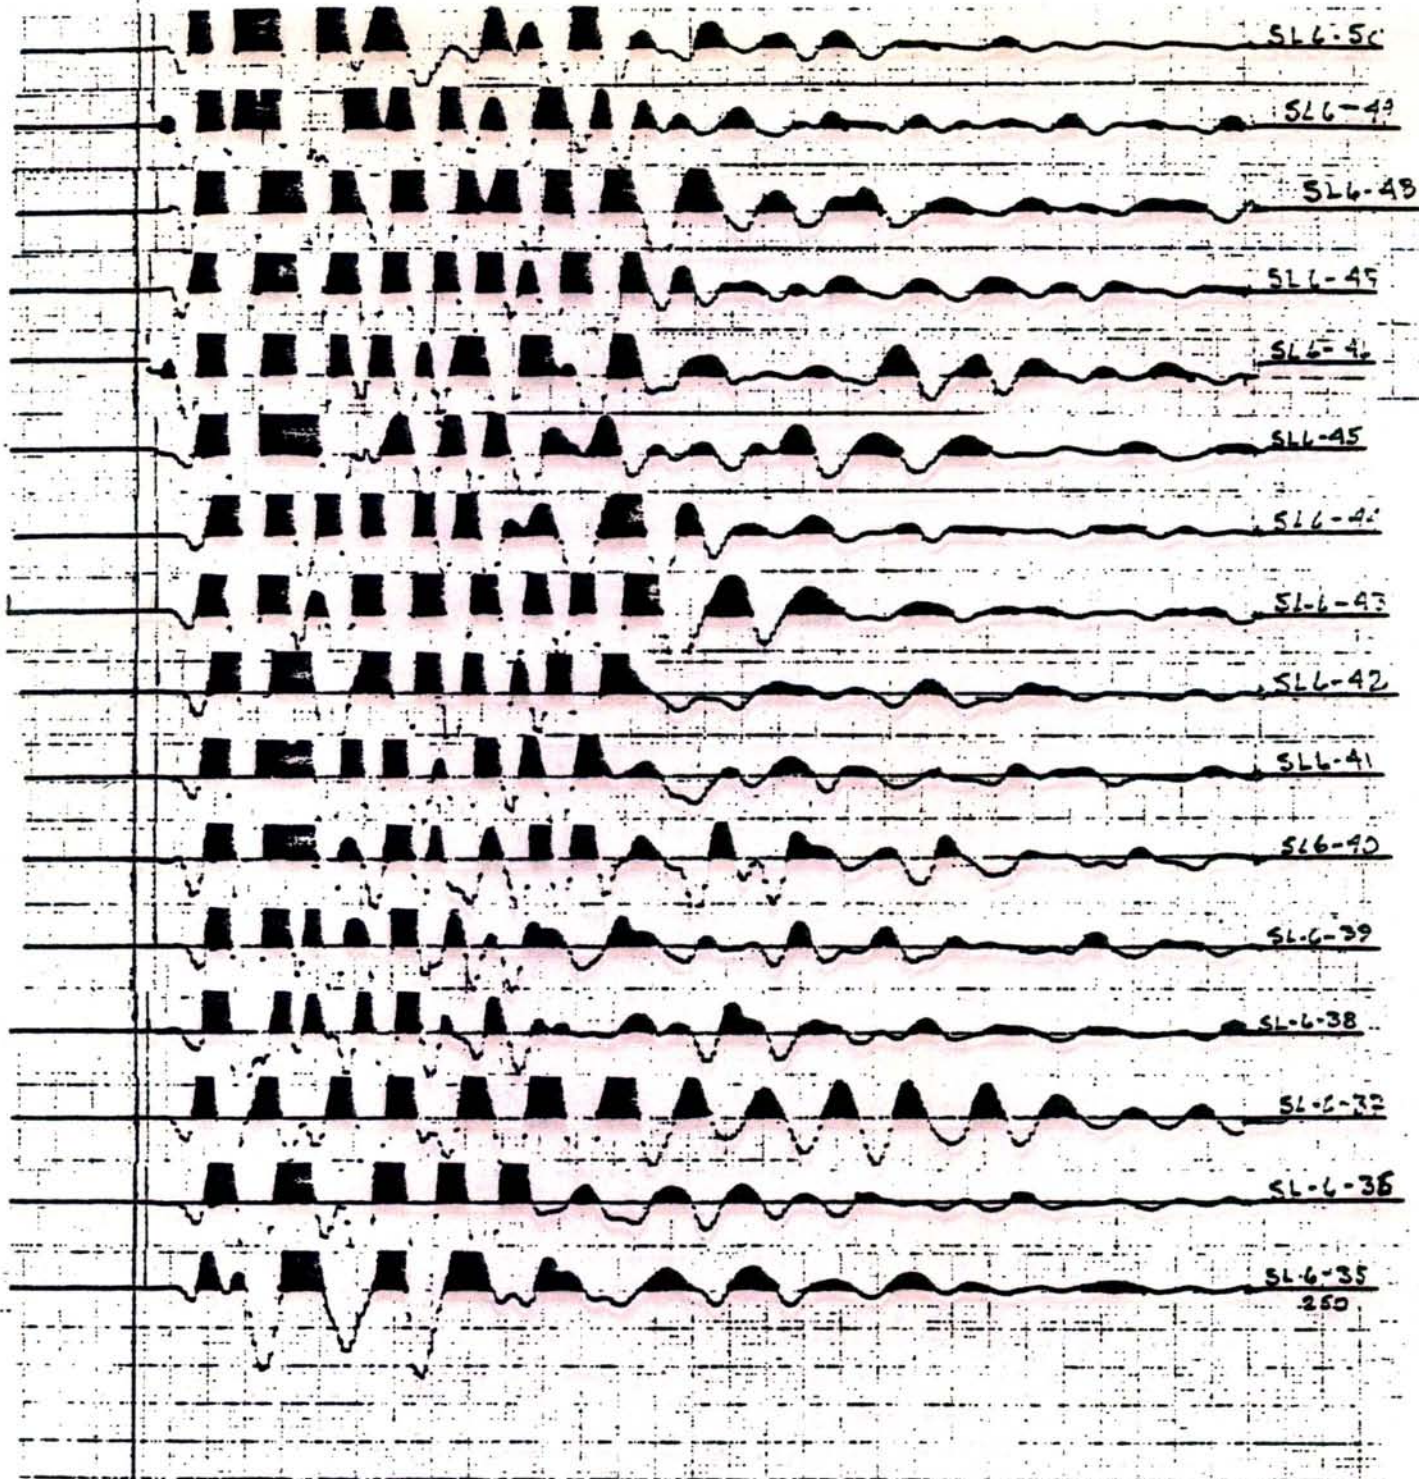

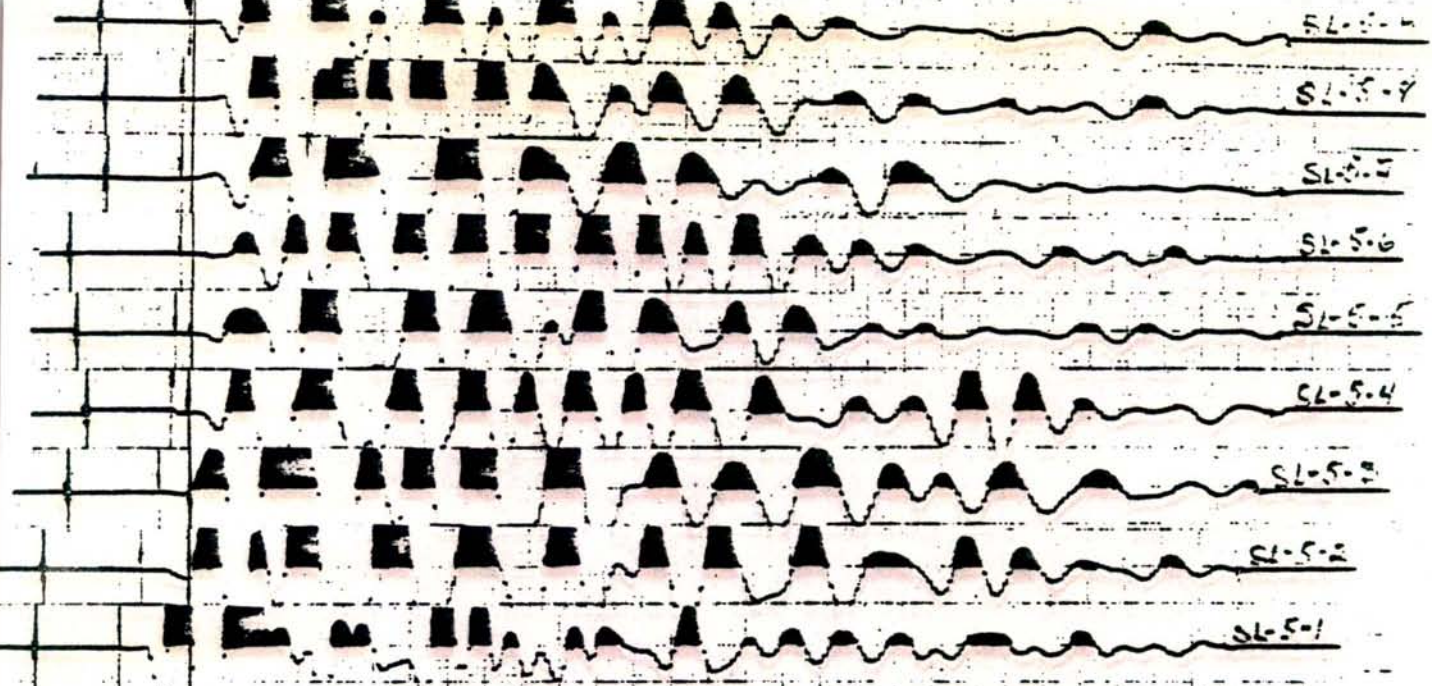

10.3.4.1

10.3.4.2

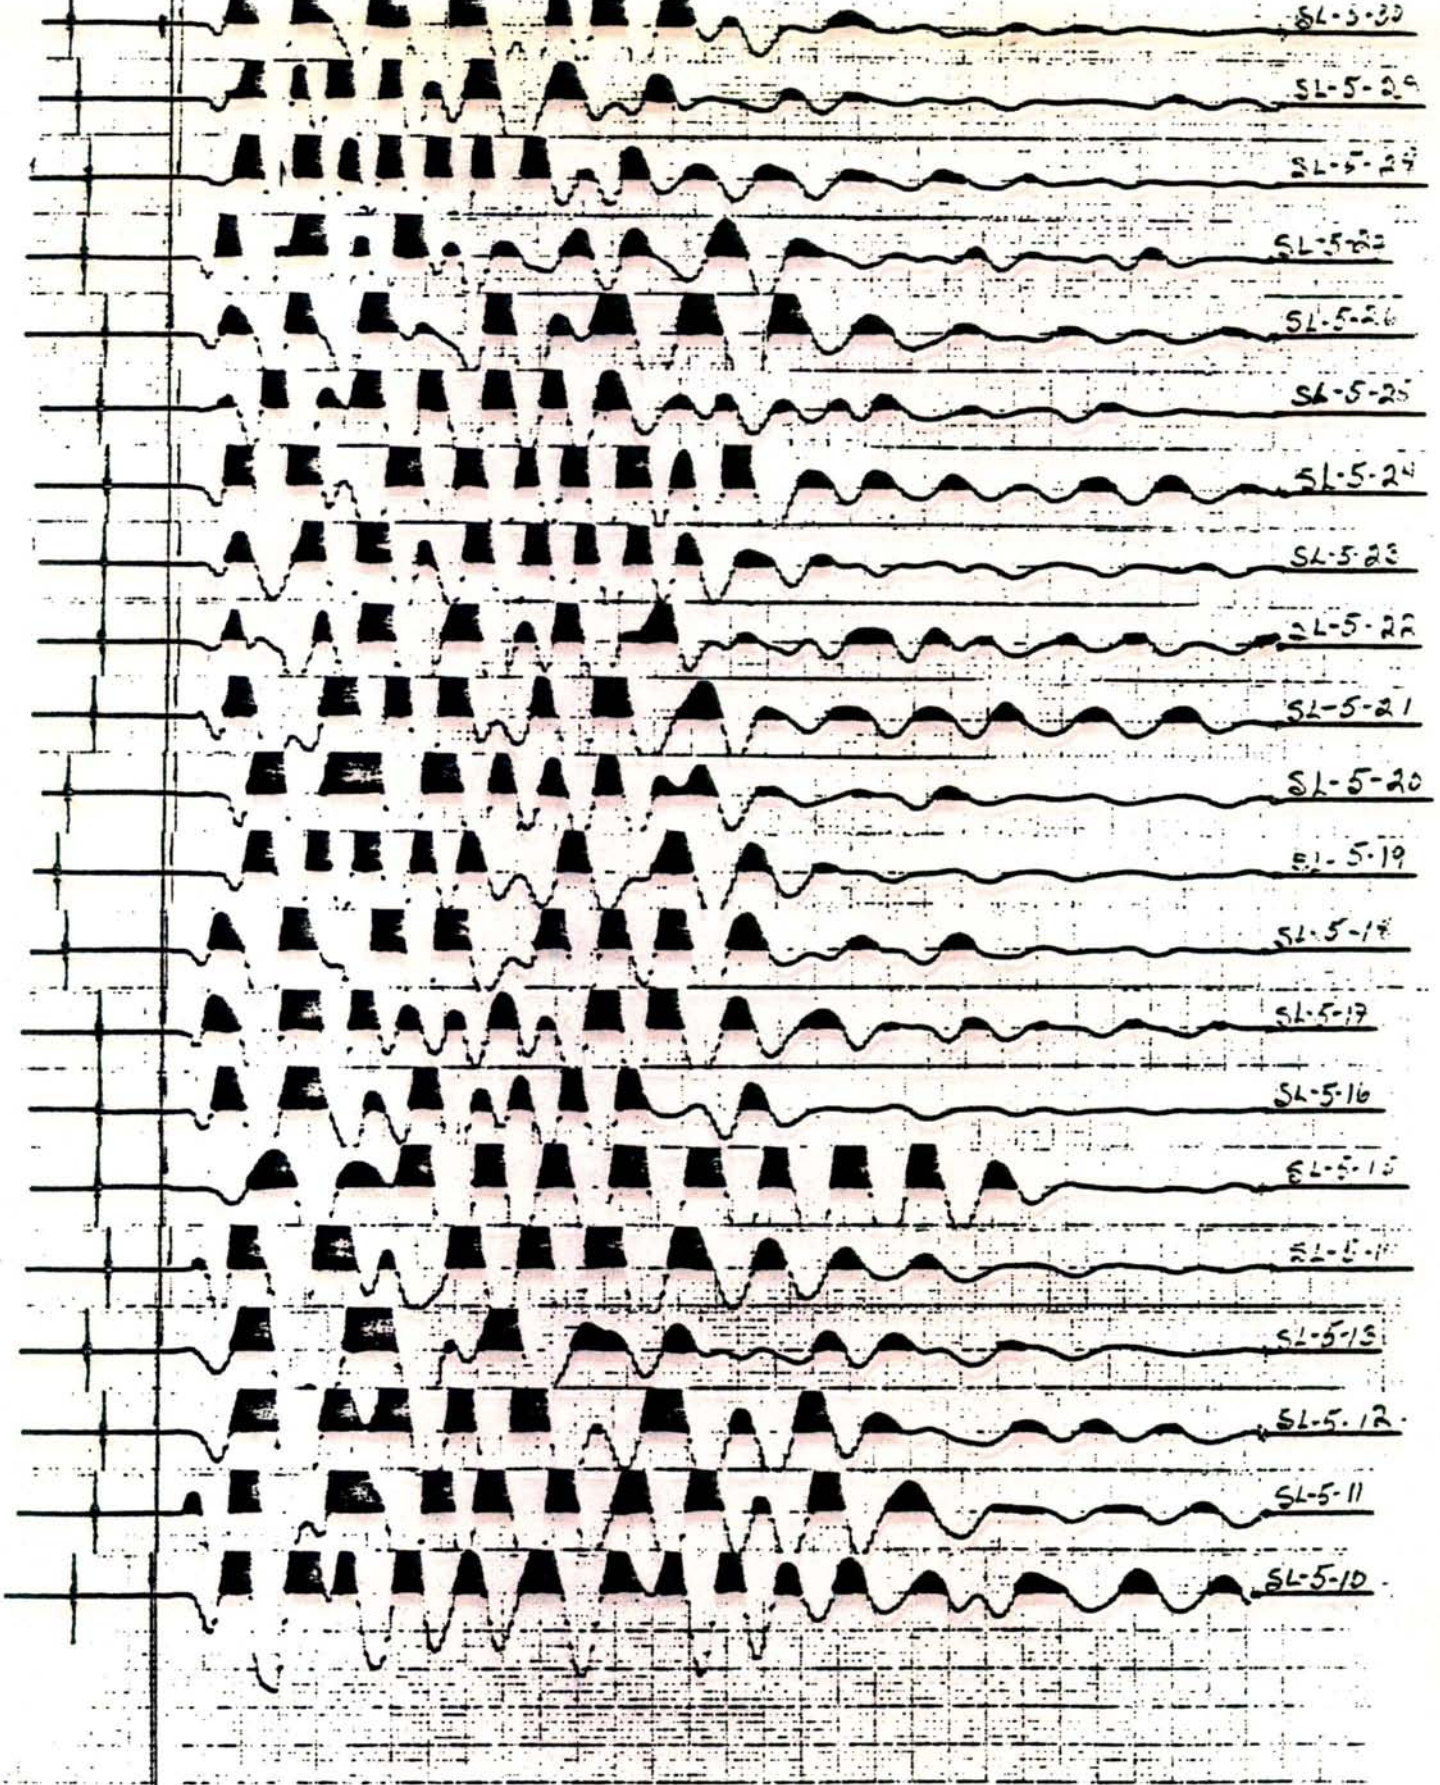

SL-5-20

SL-5-19

SL-5-18

SL-5-17

SL-5-16

SL-5-15

SL-5-14

SL-5-13

SL-5-12

SL-5-11

SL-5-10

SL-5-09

SL-5-08

SL-5-07

SL-5-06

SL-5-05

SL-5-04


SL-5-03


SL-5-02

SL-5-01


SL-5-00

SL-5-00

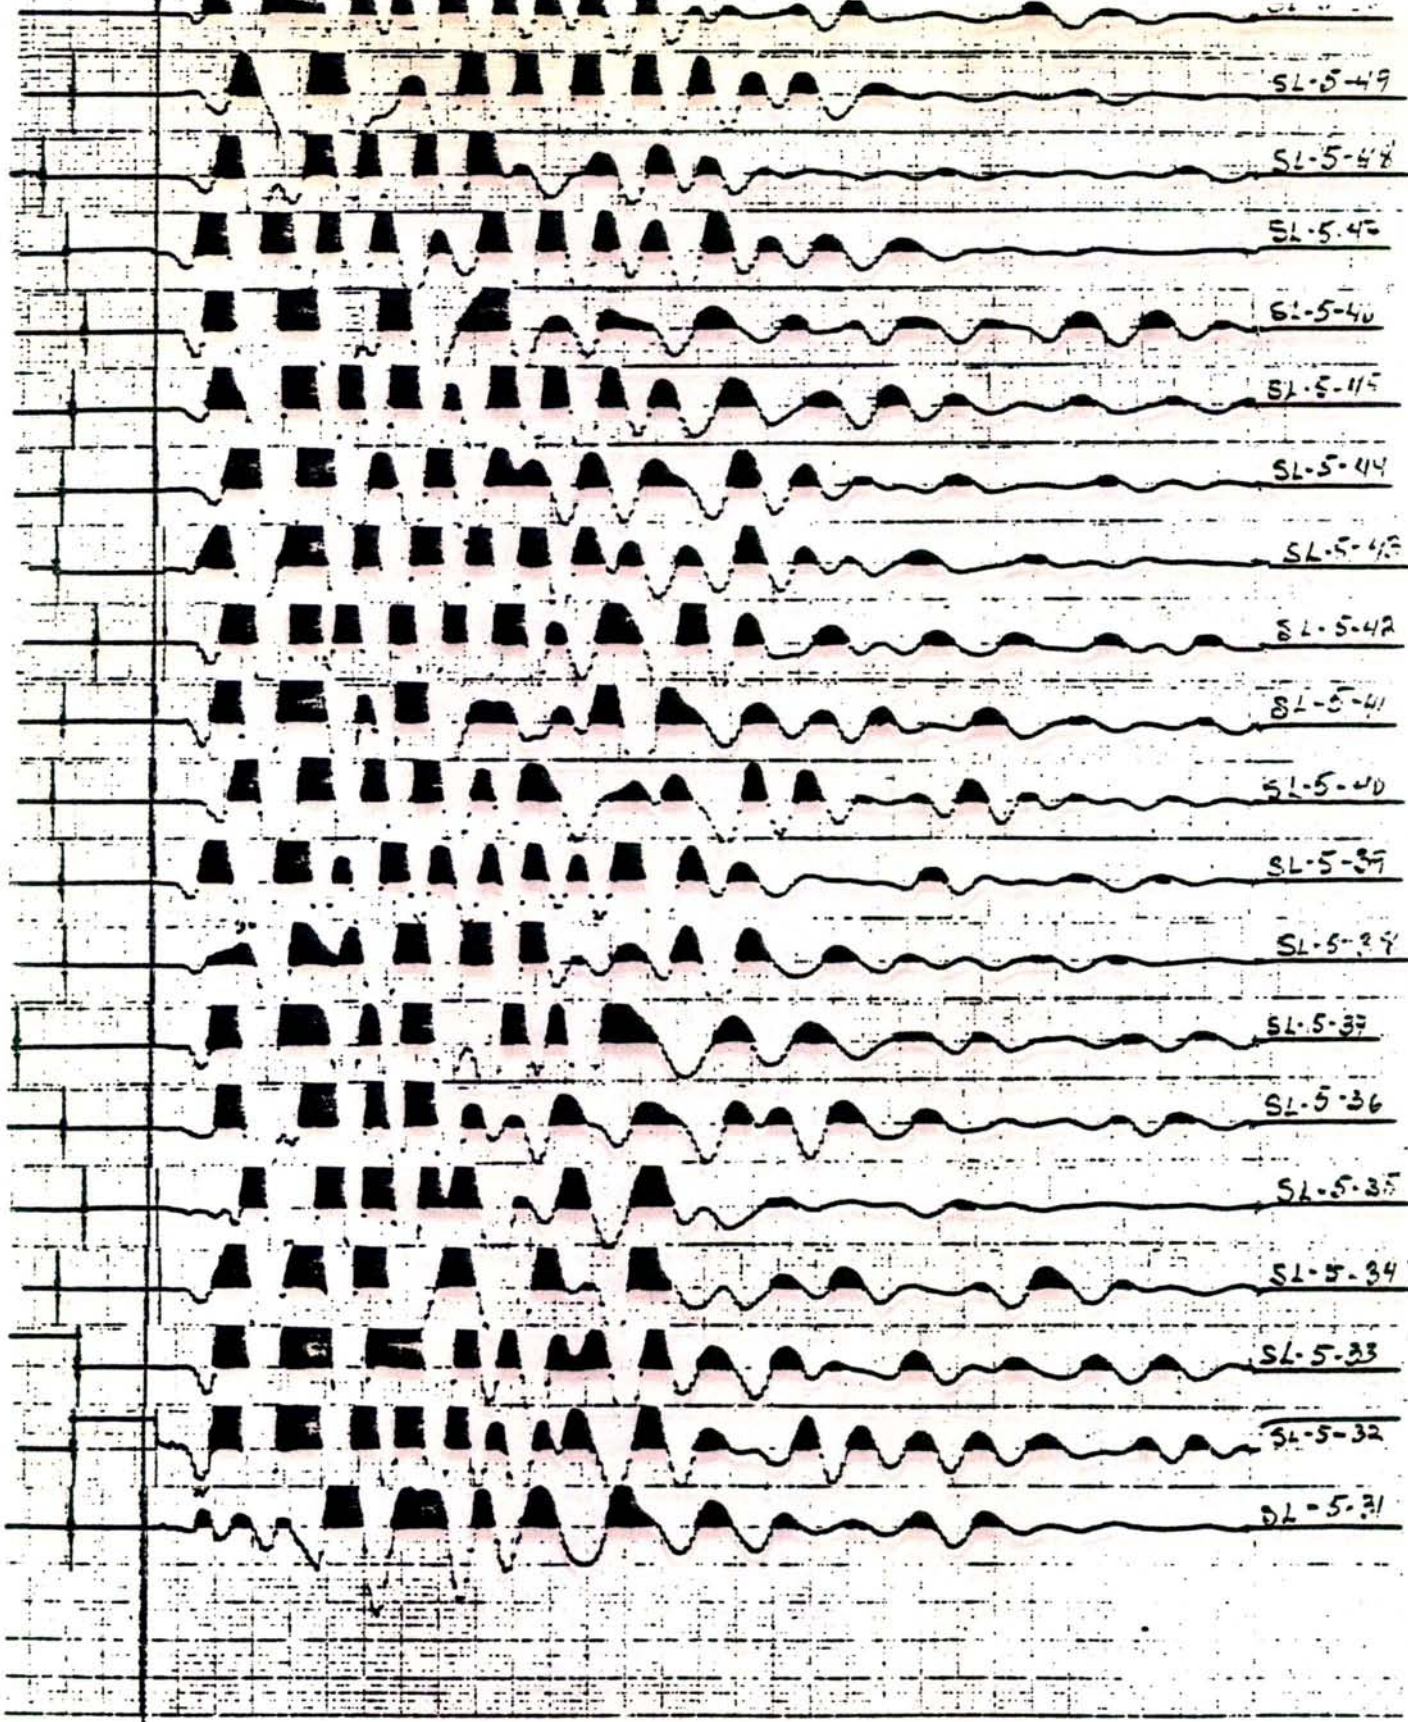

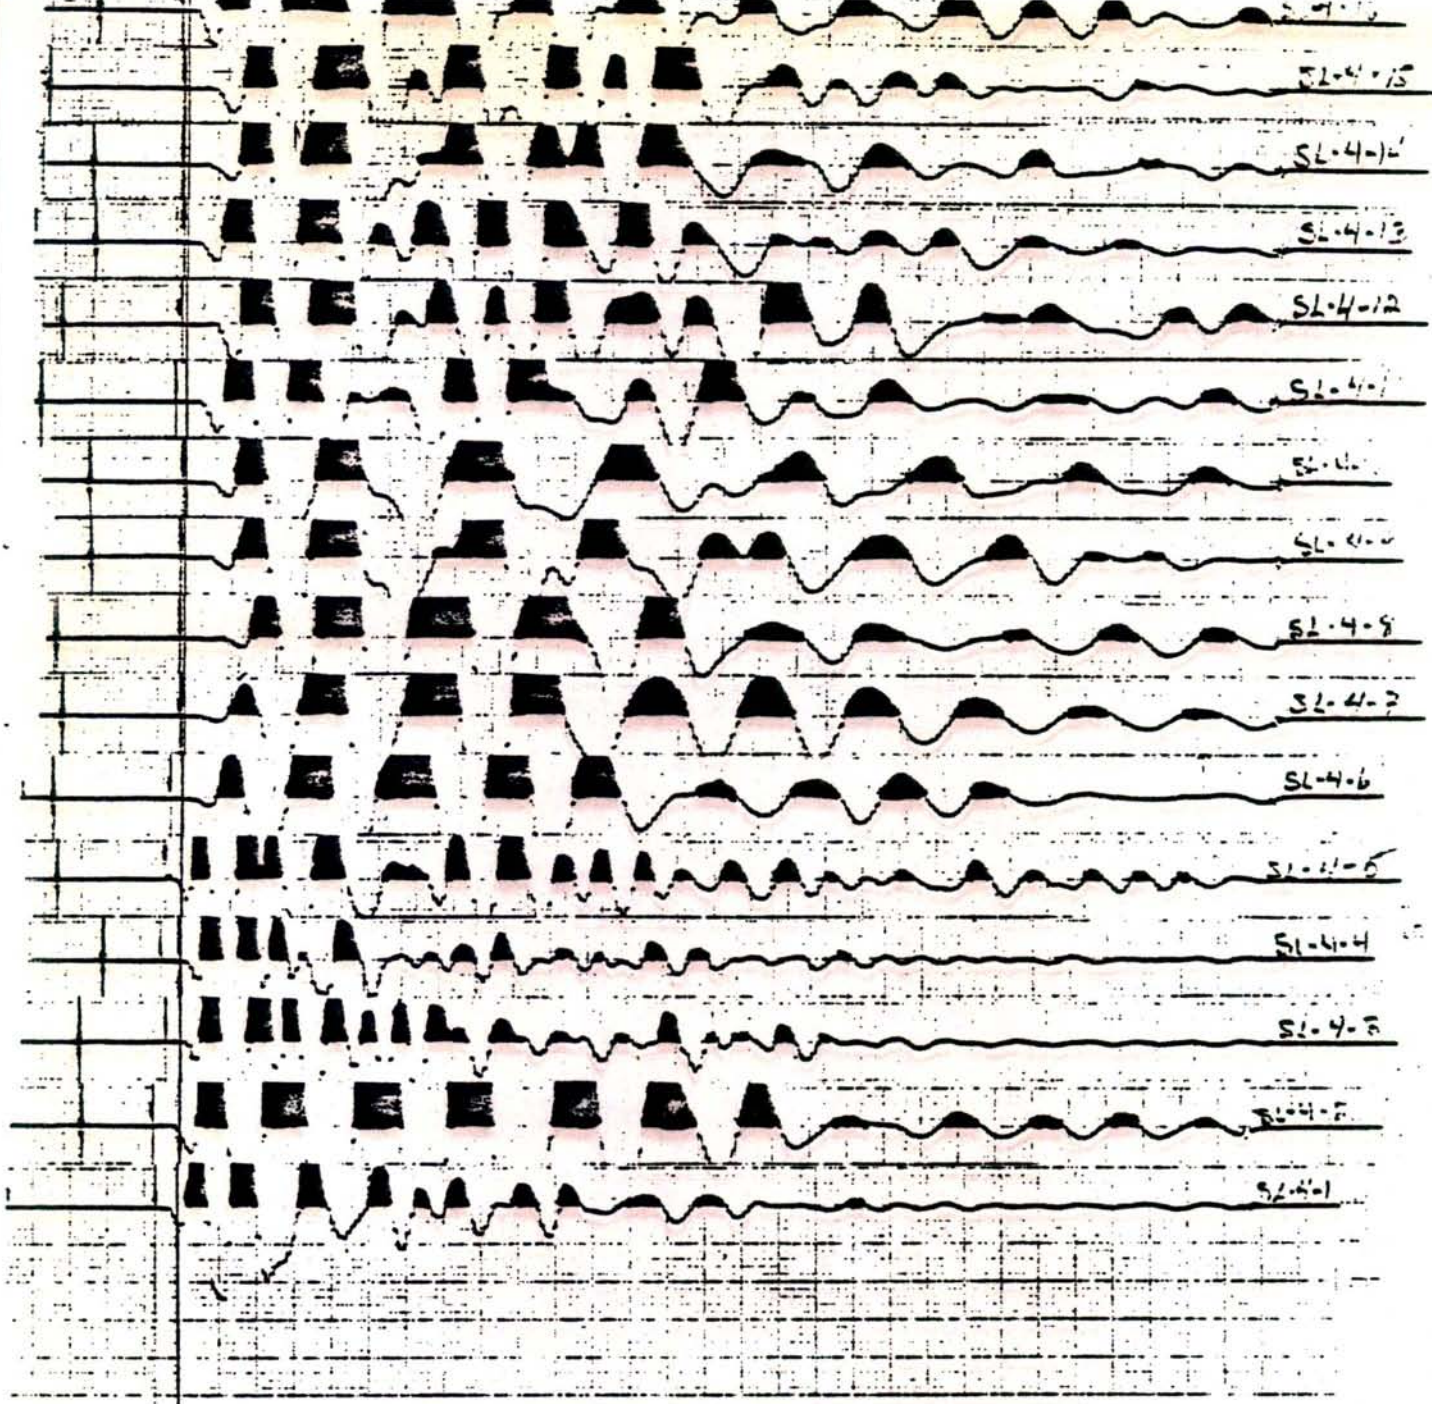

1957.11.14

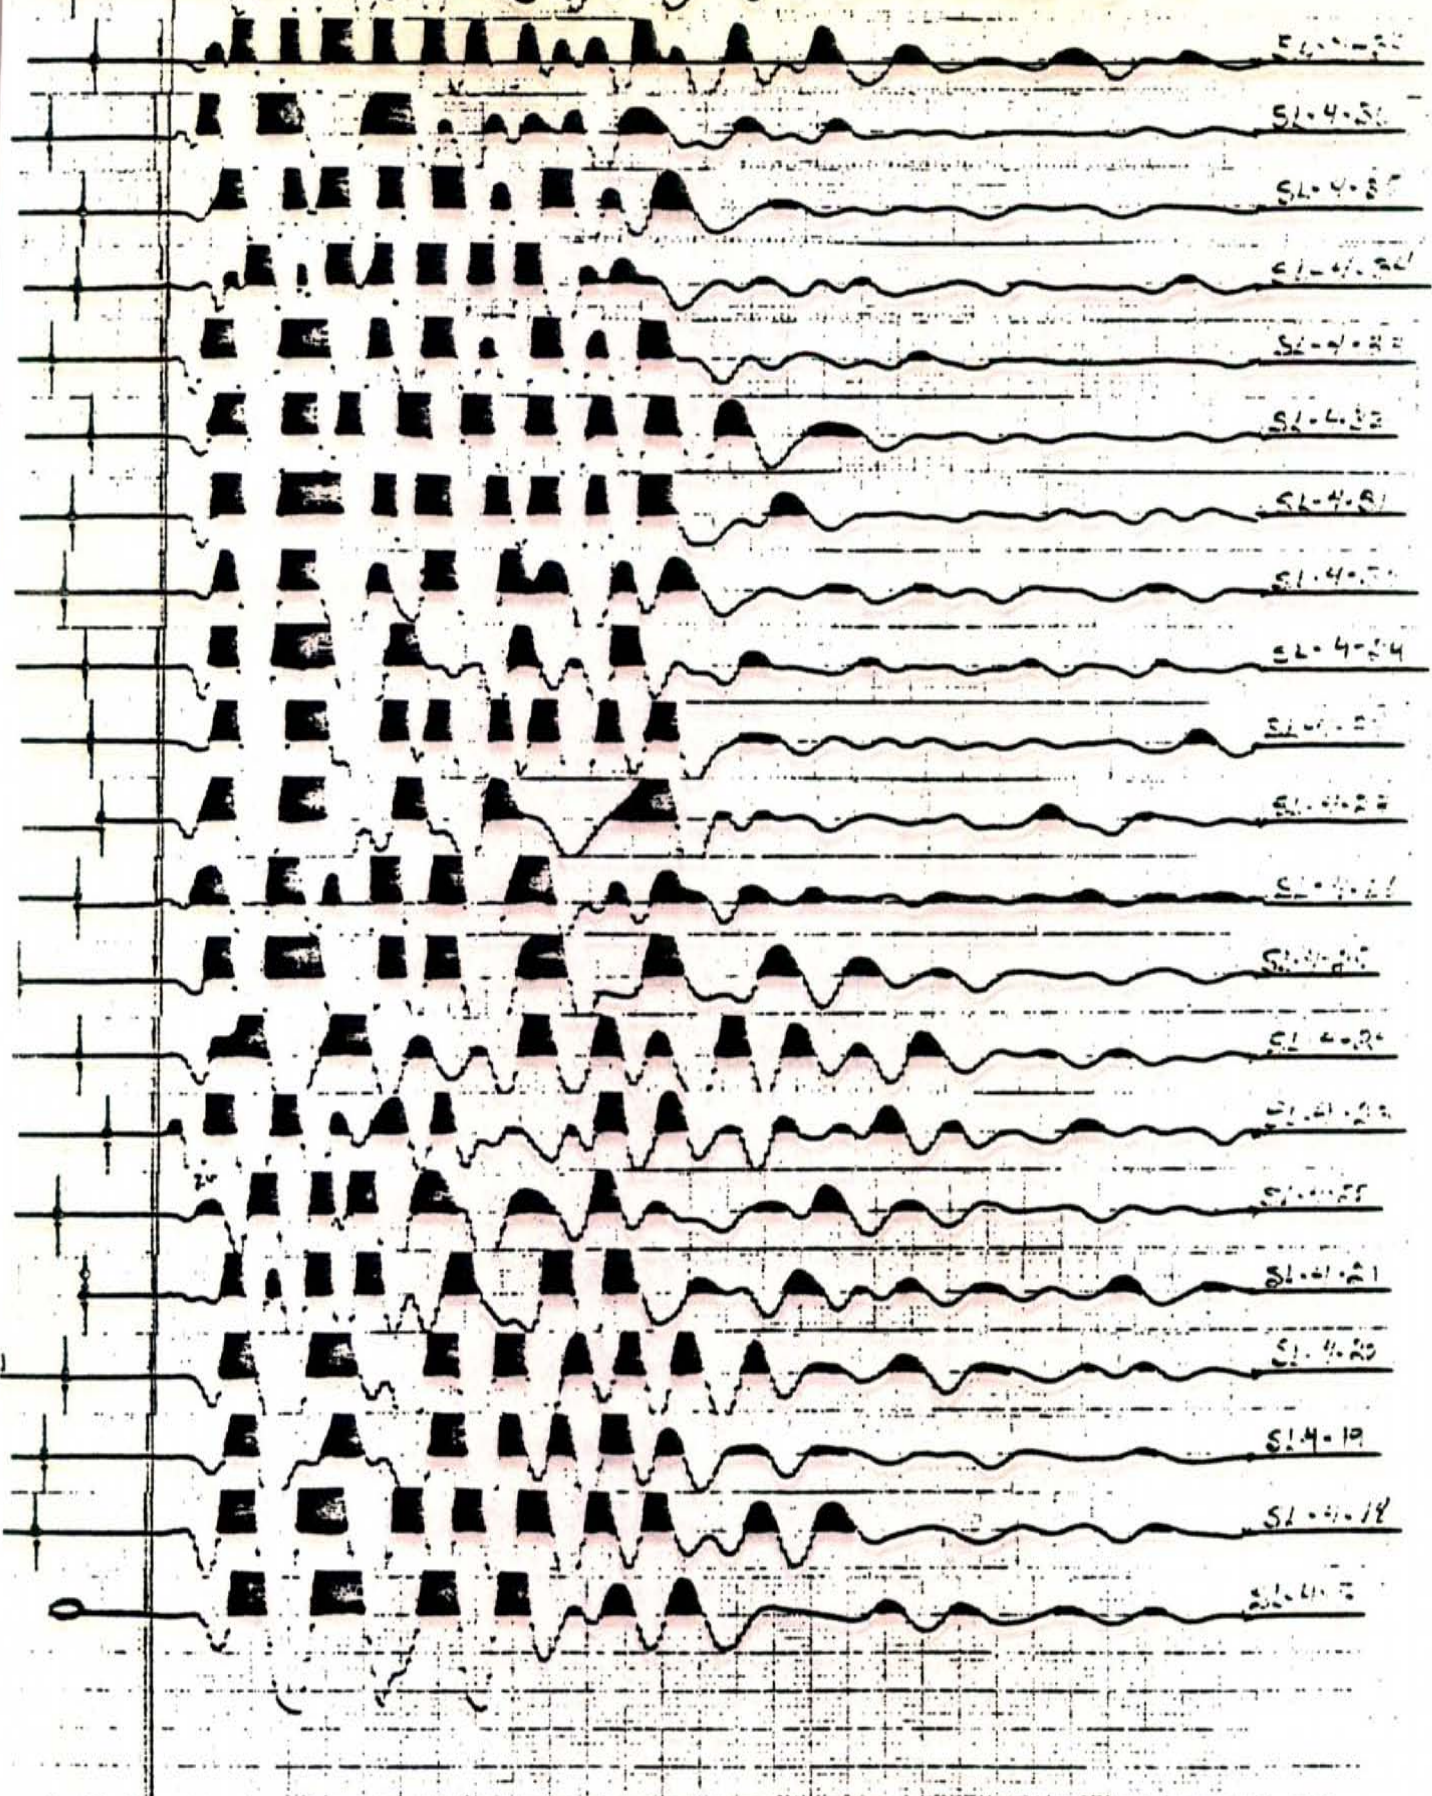

51-4-20

51-4-21

51-4-22

51-4-23

51-4-24

51-4-25

51-4-26

51-4-27

51-4-28

51-4-29

51-4-30

51-4-31

51-4-32

51-4-33

51-4-34

51-4-35

51-4-36

51-4-37


51-4-38

51-4-39

51-4-40

51-4-7

9

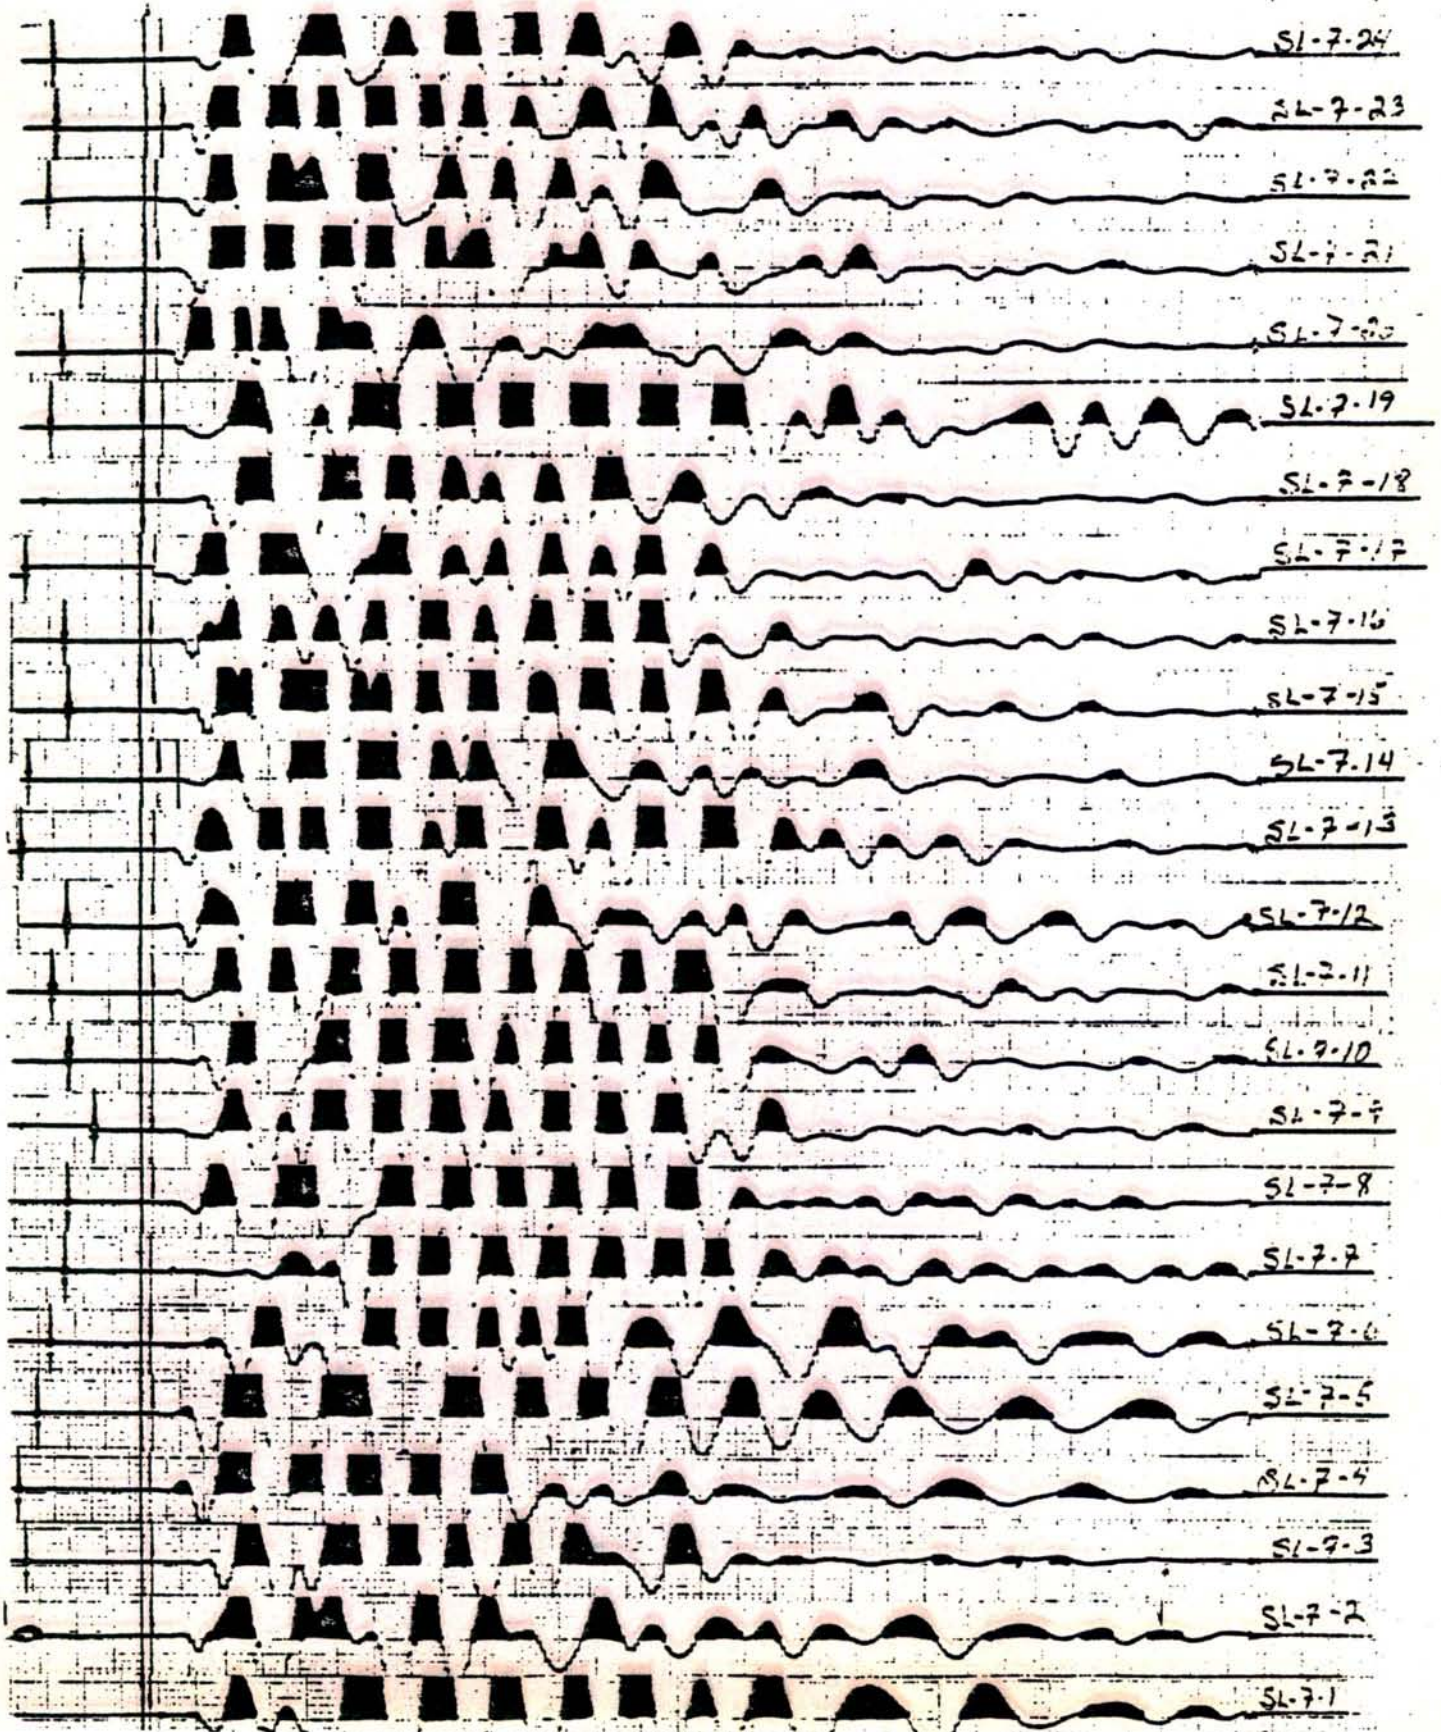

SL-7-24

SL-7-23

SL-7-22

SL-7-21

SL-7-20

SL-7-19

SL-7-18

SL-7-17

SL-7-16

SL-7-15

SL-7-14

SL-7-13

SL-7-12

SL-7-11

SL-7-10

SL-7-9

SL-7-8

SL-7-7

SL-7-6


SL-7-5


SL-7-4

SL-7-3

SL-7-2

SL-7-1

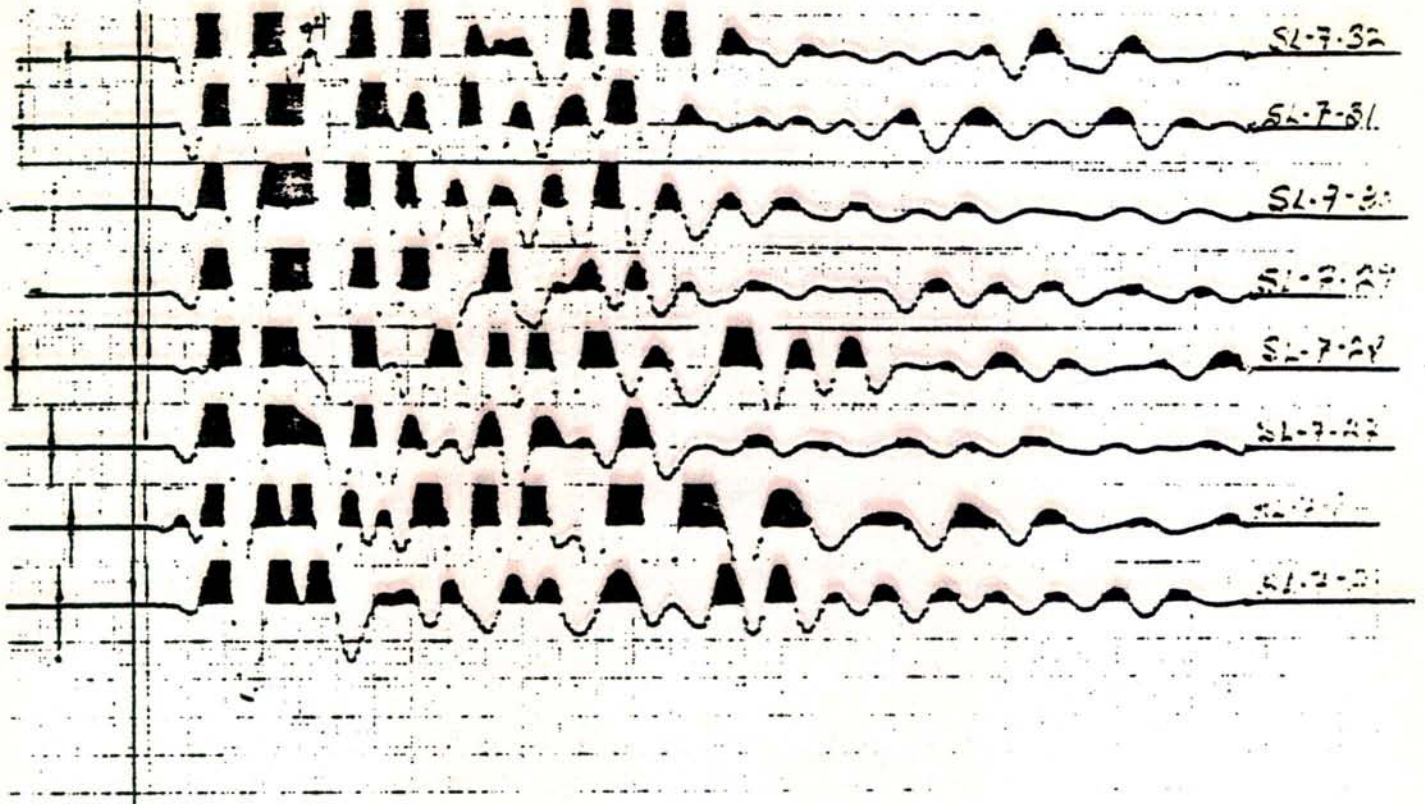

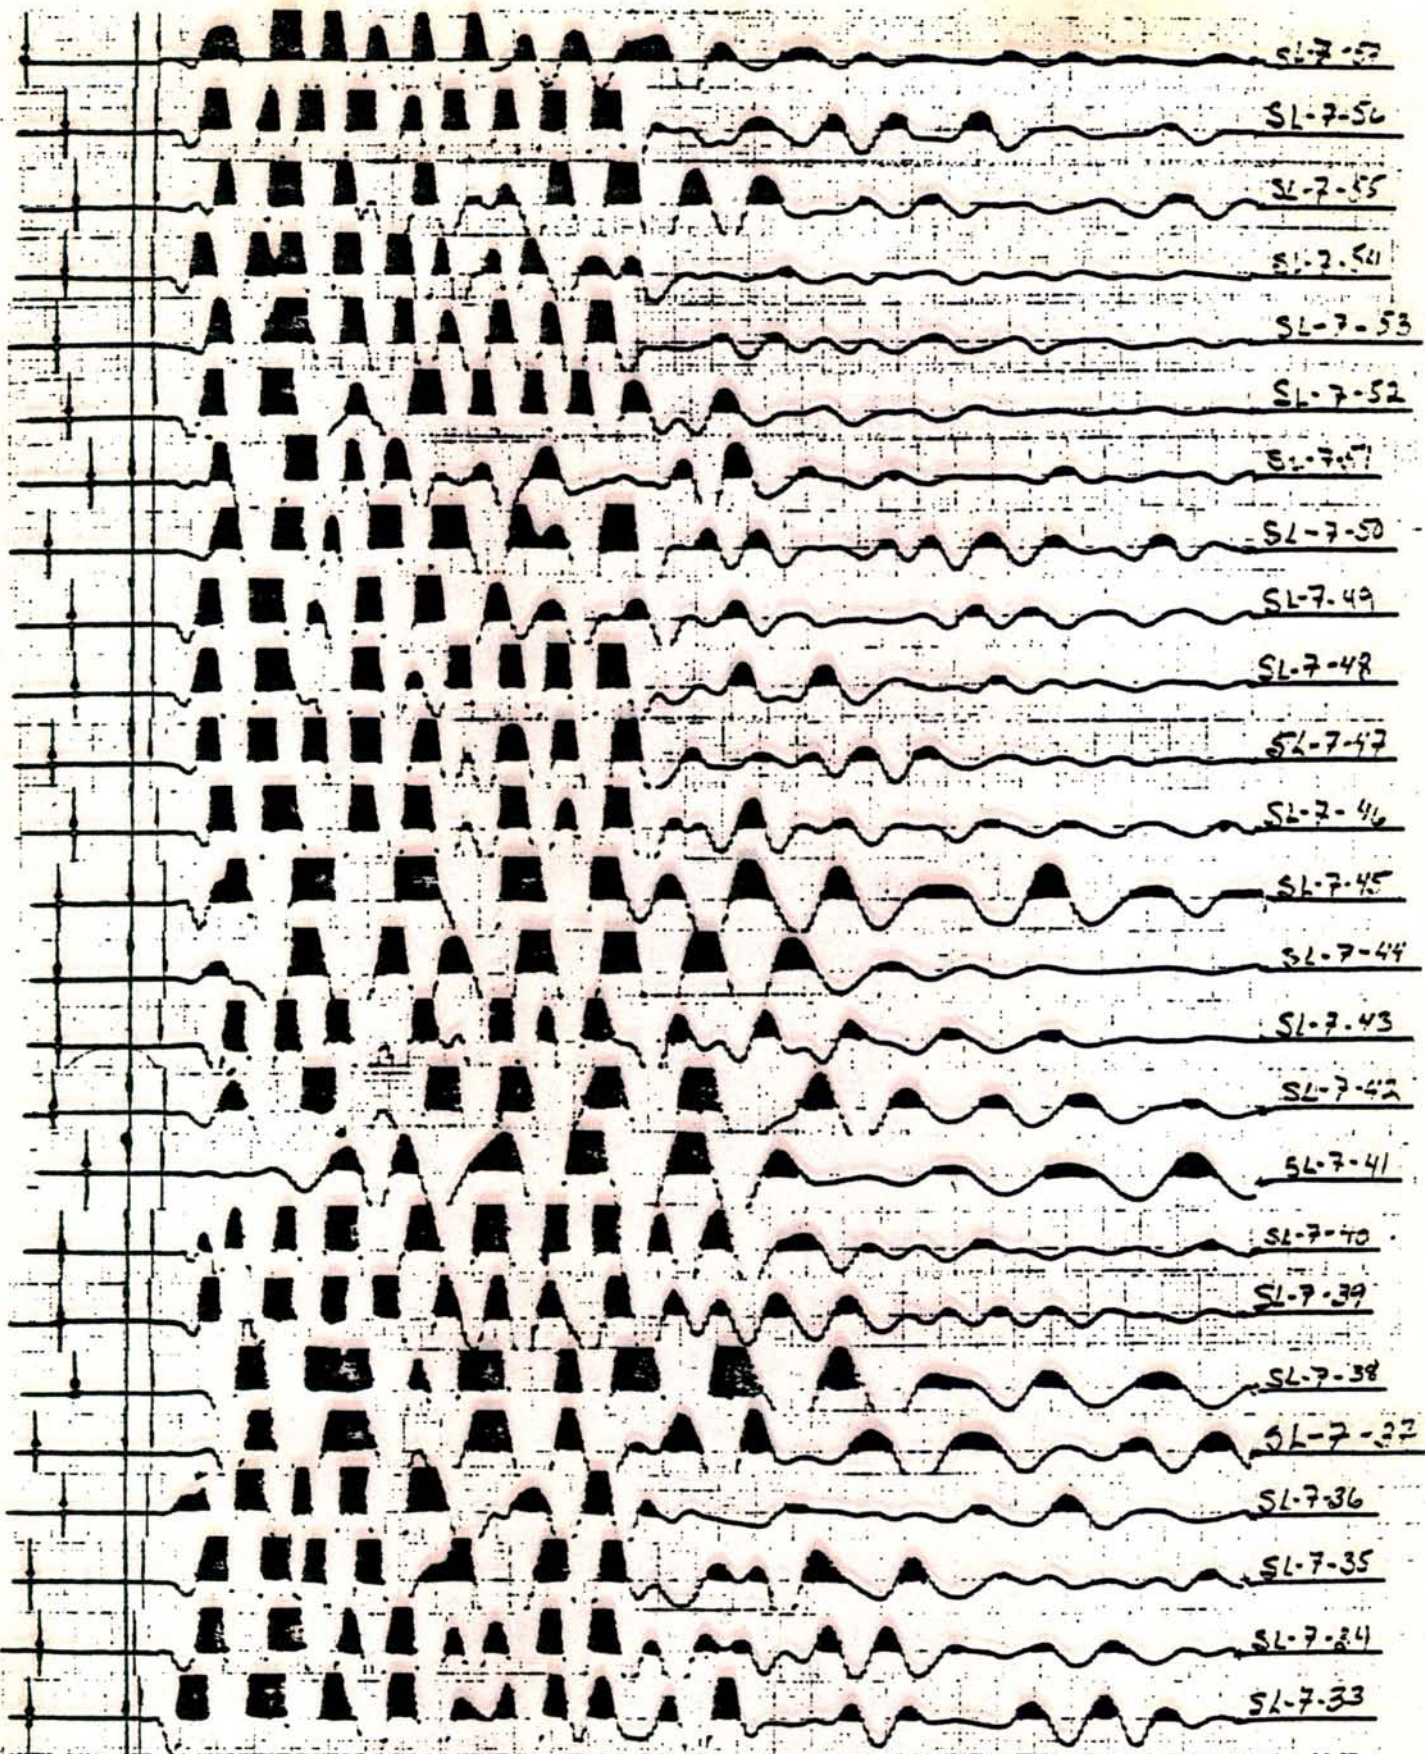

SL-7-57

SL-7-56

SL-7-55

SL-7-54

SL-7-53

SL-7-52

SL-7-51

SL-7-50

SL-7-49

SL-7-48

SL-7-47

SL-7-46

SL-7-45

SL-7-44

SL-7-43

SL-7-42

SL-7-41

SL-7-40

SL-7-39

SL-7-38

SL-7-37

SL-7-36


SL-7-35

SL-7-34

SL-7-33



SODA LAKE AREA
CHURCHILL COUNTY, NEVADA
LINES LS-1 THRU LS-7
MAP NO. MSO-340-GT-05
FILE NO. B7-F

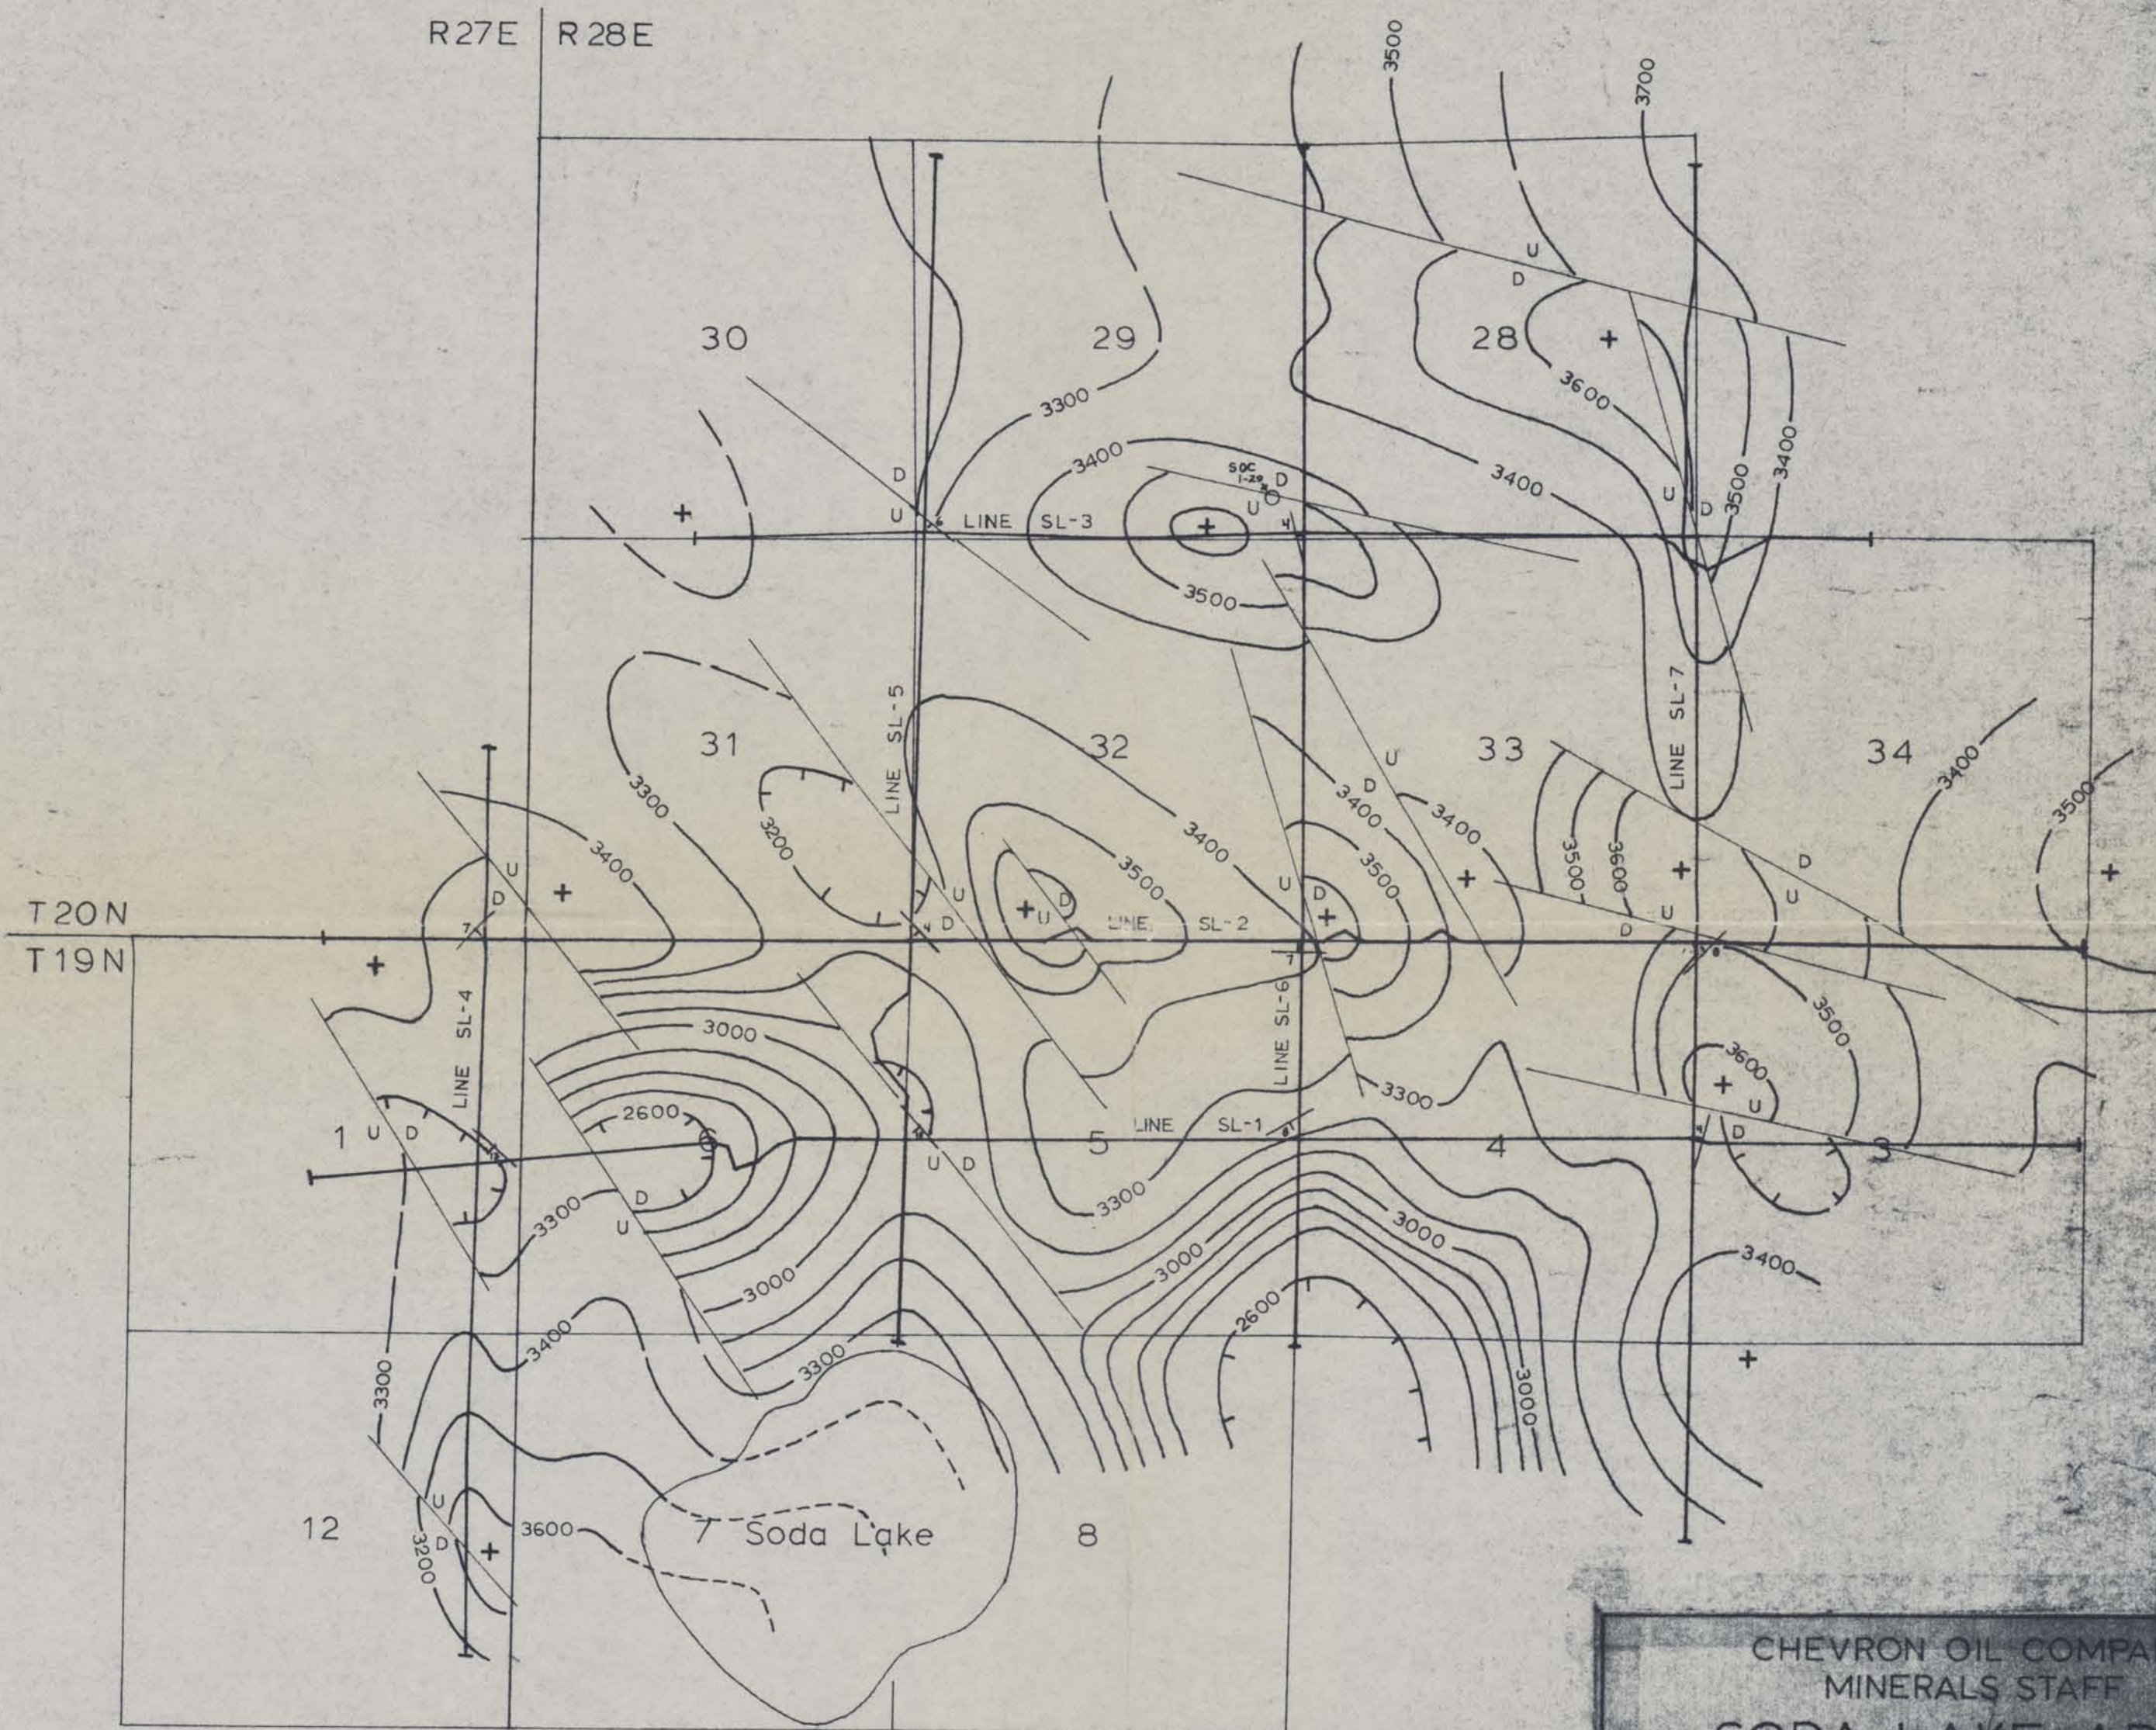


CHEVRON OIL COMPANY
 MINERALS STAFF
SODA LAKE AREA
 CHURCHILL COUNTY, NEVADA
 CONTOURS ON A SEISMIC EVENT
 WITHIN TERTIARY

Elevs. in Ft. Above MSL SCALE 1 INCH EQUALS 500 FEET C.I.: 100
 Velocity Function: Soda Lake 1-29
 $V_1 = 5000 + 4.167 \cdot Z$ (Z=1200') $V_2 = 10,000$ (Z=1200')

JUNE 15, 1975 CHARLES B. REYNOLDS & ASSOC.

LINE SL-1



Dip Resolutions - Line SL-1

- | | |
|--|--|
| <p>Intersection with Line SL-4: (a) @ 300'±, dip 4° W, offset 10' (b) @ 800'±, dip 13° S43° W, Offset 168'</p> | <p>Intersection with Line SL-5: (a) @ 225'±, dip 10° N16° W, offset 32' (b) @ 850'±, dip 10° S47° W, offset 153' (c) @ 1635'±, dip 14° W, offset 410'</p> |
| <p>Intersection with Line SL-6: (a) @ 500'±, dip 6° S, offset 45' (b) @ 705'±, dip 8° S30° E, offset 107'</p> | <p>Intersection with Line SL-7: (a) @ 655'±, dip 4° N76° W, offset 51'</p> |


⊙ - APPARENT DIFFRACTION CENTER

CHEVRON OIL COMPANY
 MINERALS STAFF
SODA LAKE AREA
 CHURCHILL COUNTY, NEVADA
 MIGRATED DEPTH SECTION
SEISMIC LINE SL-1

SCALE 1 INCH EQUALS 500 FEET
 Velocity Function: Soda Lake 1-29
 $V_1 = 5000 + 4.167 \cdot Z$ ($Z < 1200'$) $V_2 = 10,000$ ($Z > 1200'$)

APRIL 19, 1975 CHARLES B. REYNOLDS & ASSOC.

LINE SL-2



Dip Resolutions - Line SL-2

Intersection with Line SL-4:

- (a) @ 340'±, dip 9°E, offset 50'
- (b) @ 610'±, dip 7° S45°E, offset 88'
- (c) @ 1085'±, dip 11° S38°E, offset 214'

Intersection with Line SL-5:

- (a) @ 545'±, dip 5° N37°W, offset 100'
- (b) @ 825'±, dip 4° S45°W, offset 81'

Intersection with Line SL-6:

- (a) @ 480'±, dip 6°N, offset 60'
- (b) @ 670'±, dip 7°N, offset 80'

Intersection with Line SL-7:

- (a) @ 275'±, dip 7° N56°W, offset 39'
- (b) @ 600'±, dip 8° N45°W, offset 89'
- (c) @ 785'±, dip 19° N9°W, offset 272'

Ⓧ APPARENT DIFFRACTION CENTER


CHEVRON OIL COMPANY
MINERALS STAFF
SODA LAKE AREA
CHURCHILL COUNTY, NEVADA
MIGRATED DEPTH SECTION
SEISMIC LINE SL-2

SCALE 1 INCH EQUALS 500 FEET
Velocity Function: Soda Lake 1-29
V₁=5000+4.167·Z (Z<1200') V₂=10,000 (Z>1200')

MAY 1, 1975 CHARLES B. REYNOLDS & ASSOC.

LINE SL-3

CHEVRON
SODA LAKE 1-29
560' NORTH

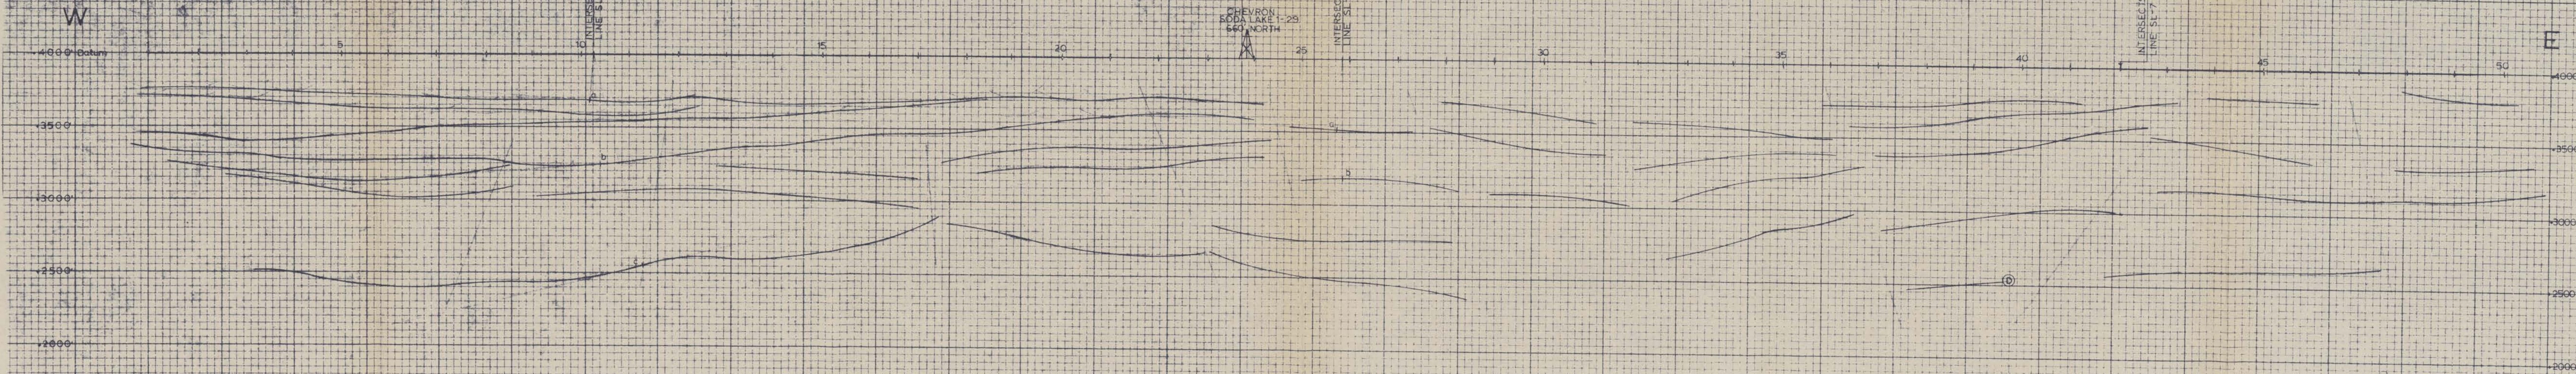

Dip Resolutions - Line SL-3

- | | |
|--|--|
| Intersection with Line SL-5: | Intersection with Line SL-6: |
| (a) @ 320' ±, dip 5° S68° E, offset 29' | (a) @ 470' ±, dip 4° N76° E, offset 43' |
| (b) @ 760' ±, dip 8° S39° W, offset 71' | (b) @ 850' ±, dip 10° N6° W, offset 170' |
| (c) @ 1480' ±, dip 22° S39° W, offset 375' | |

Intersection with Line SL-7 is not considered suitable for dip resolutions because of curvature in both lines at that point.

APPARENT
DIFRACTION
CENTER

CHEVRON OIL COMPANY
MINERALS STAFF

SODA LAKE AREA
CHURCHILL COUNTY, NEVADA


MIGRATED DEPTH SECTION
SEISMIC LINE SL-3

SCALE 1 INCH EQUALS 500 FEET
Velocity Function: Soda Lake 1-29
V₁ = 5000 + 4.167 · Z (Z < 1200') V₂ = 10,000 (Z > 1200')

MAY 6, 1975 CHARLES B. REYNOLDS & ASSOC.

LINE SL-3


LINE SL-4

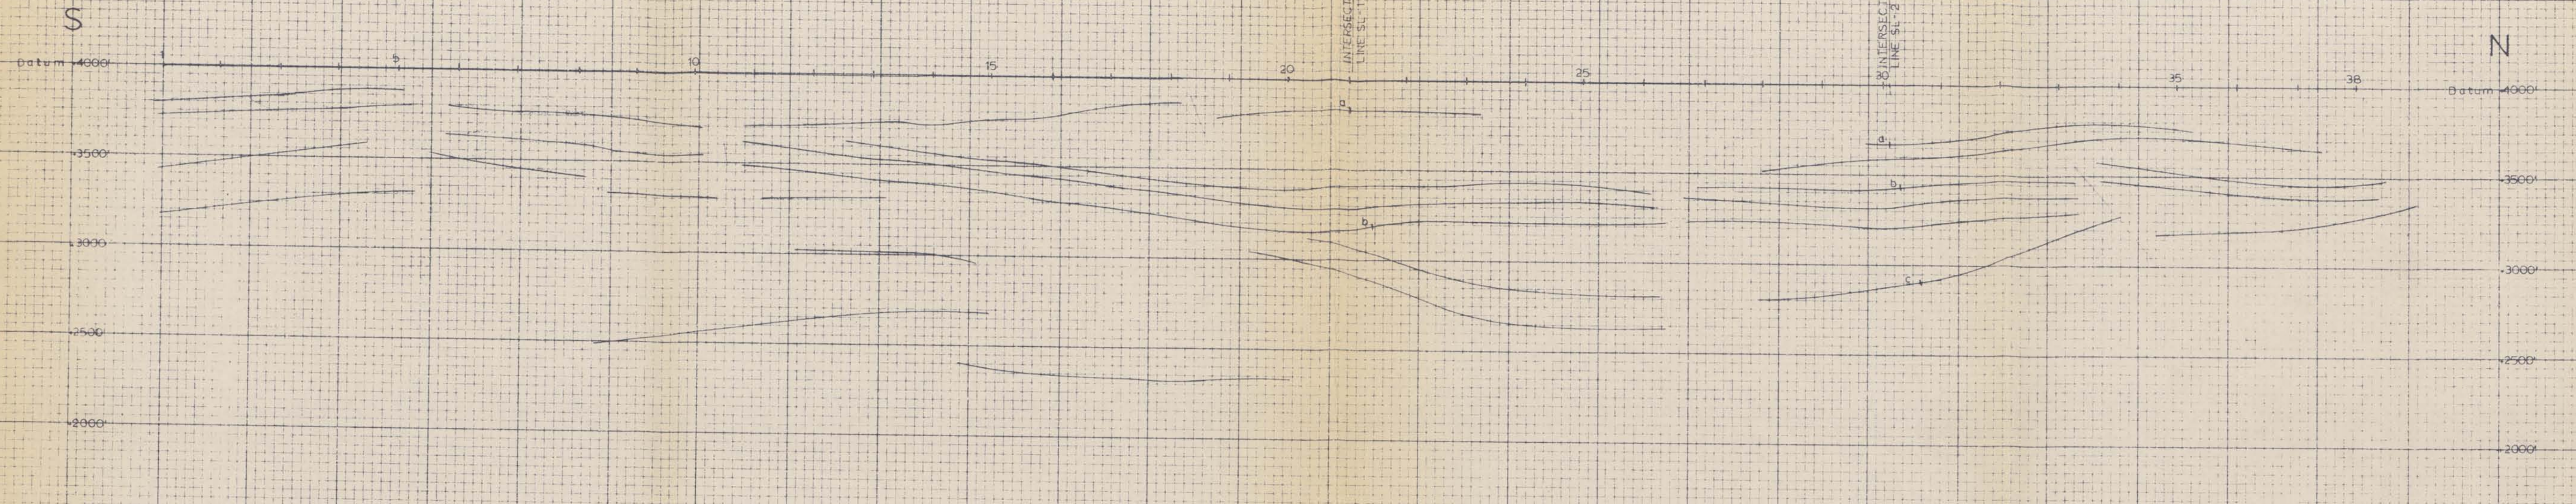

CHEVRON OIL COMPANY
MINERALS STAFF
SODA LAKE AREA
CHURCHILL COUNTY, NEVADA
MIGRATED DEPTH SECTION
SEISMIC LINE SL-4

SCALE 1 INCH EQUALS 500 FEET
Velocity Function: Soda Lake 1-29
 $V_1 = 5000 + 4.167 \cdot Z$ ($Z < 1200'$) $V_2 = 10,000$ ($Z \geq 1200'$)
MAY 17, 1975 CHARLES B. REYNOLDS & ASSOC.

LINE SL-5

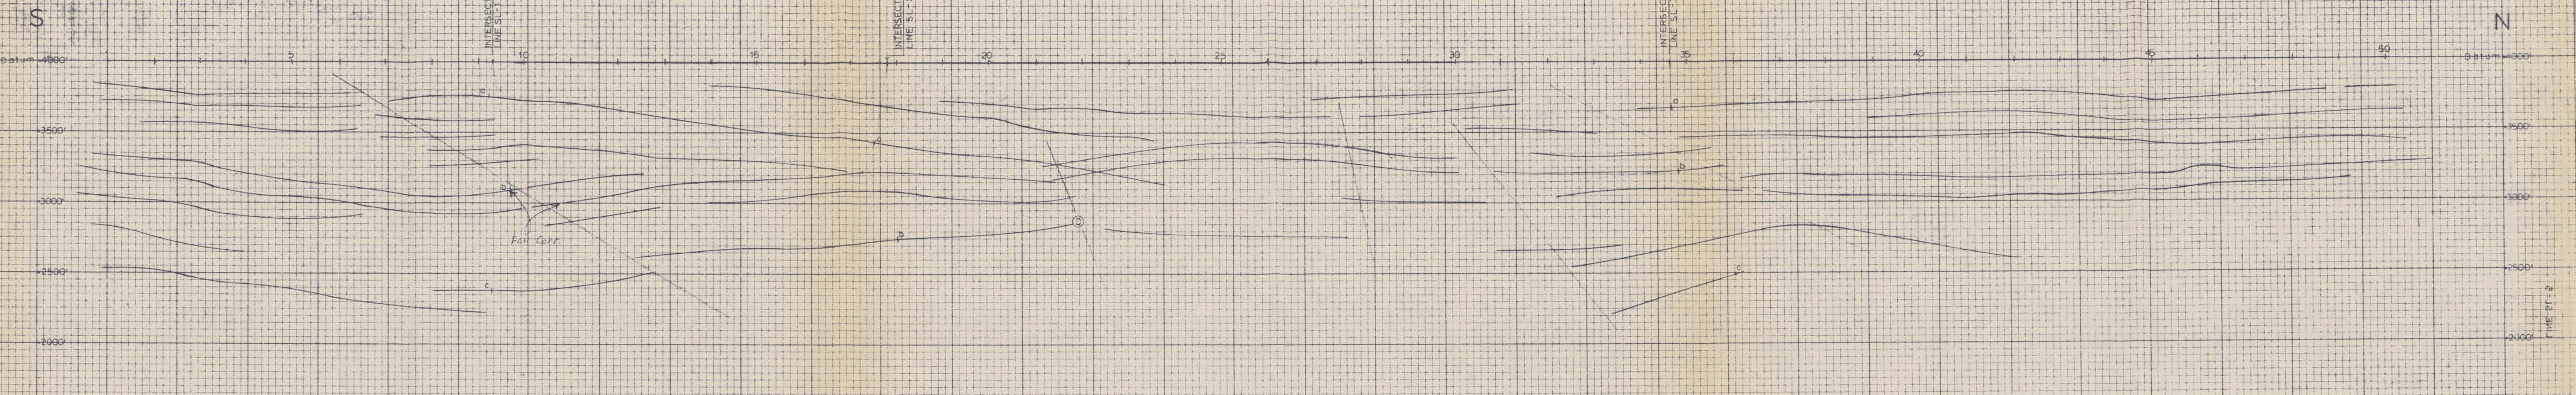


Ⓧ APPARENT DIFFRACTION CENTER

CHEVRON OIL COMPANY
MINERALS STAFF
SODA LAKE AREA
CHURCHILL COUNTY, NEVADA
MIGRATED DEPTH SECTION
SEISMIC LINE SL-5

SCALE 1 INCH EQUALS 500 FEET
Velocity Function: Soda Lake 1-29
 $V_1 = 5000 + 4.167 \cdot Z$ ($Z < 1200'$) $V_2 = 10,000$ ($Z \geq 1200'$)
MAY 24, 1975 CHARLES B. REYNOLDS & ASSOC.

MAP NO. MS0453
FILE NO. B7-F

LINE SL-6

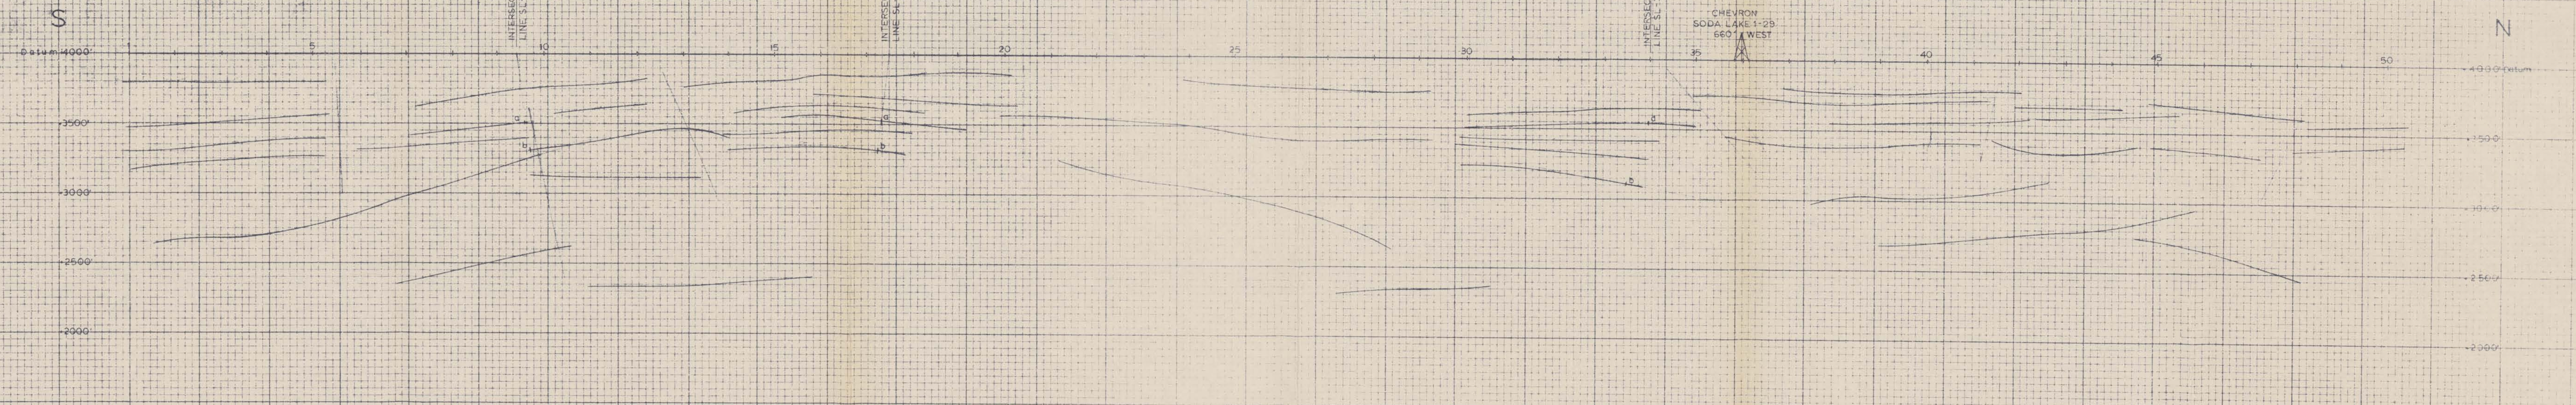


CHEVRON OIL COMPANY
MINERALS STAFF
SODA LAKE AREA
CHURCHILL COUNTY, NEVADA
MIGRATED DEPTH SECTION
SEISMIC LINE SL-6

SCALE 1 INCH EQUALS 500 FEET
Velocity Function: Soda Lake 1-29
 $V_1 = 5000 + 4.167 \cdot Z$ ($Z < 1200'$) $V_2 = 10,000$ ($Z \geq 1200'$)

JUNE 10, 1975 CHARLES B. REYNOLDS & ASSOC.

LINE SL-7

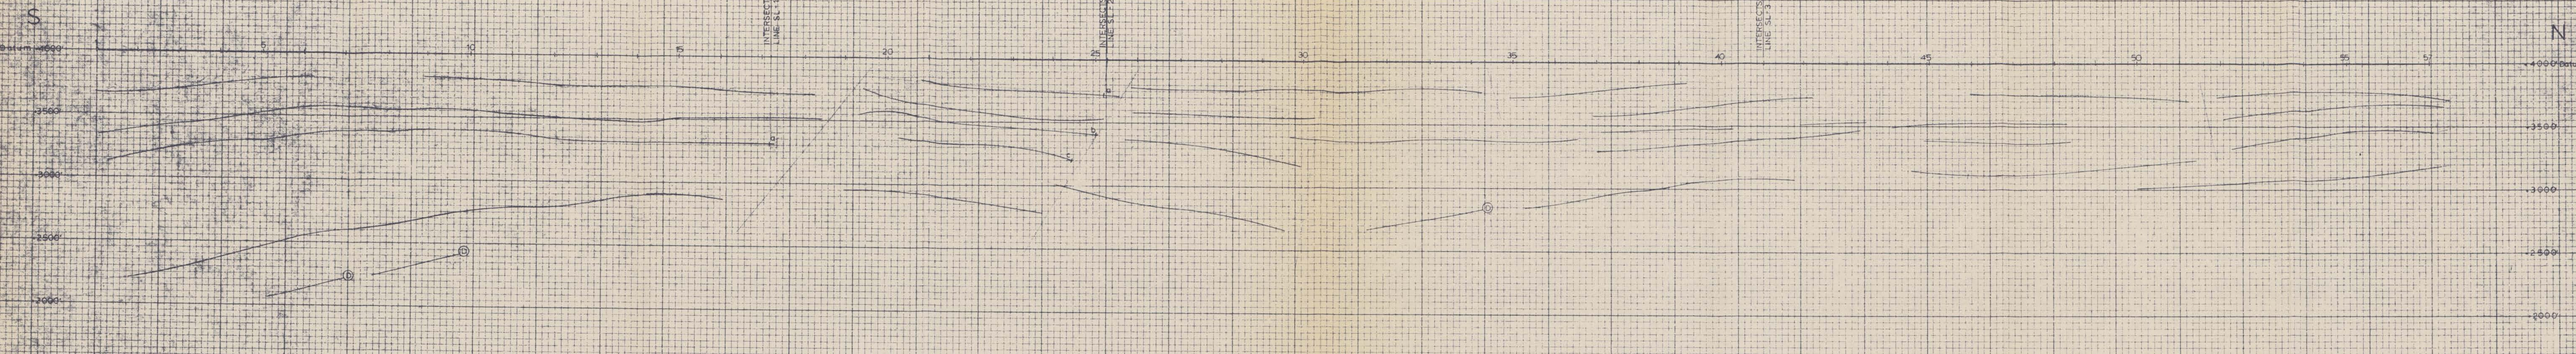

⊙ APPARENT DIFFRACTION CENTER

CHEVRON OIL COMPANY
 MINERALS STAFF
SODA LAKE AREA
 CHURCHILL COUNTY, NEVADA
 MIGRATED DEPTH SECTION
SEISMIC LINE SL-7

SCALE 1 INCH EQUALS 500 FEET
 Velocity Function: Soda Lake 1-29
 $V_1 = 5000 + 4.167 \cdot Z$ ($Z < 1200'$) $V_2 = 10,000$ ($Z > 1200'$)
 JUNE 12, 1975 CHARLES B. REYNOLDS & ASSOC.

MAP NO. MS0455
FILE NO. B7-F